

VRAJ LINK

AUTHORIZED DEALER & DISTRIBUTORS

Address :- Shop No. 17, Opp. Electric Crematorium, 66/74 Chandan Wadi, Marine Lines (E), Mumbai - 400002

Email :- vrajlink09@gmail.com

Contact :- 9223310978 / 9833935831

Website :- www.vrajlink.com

PRICE LIST

Nov 1st
2023

Solutions for Power Switching, Power Monitoring and Power Conversion





When **energy** matters

The 4th generation of trustworthy power protection

- The best protection with a cost-effective approach.
- Extremely reliable, robust and durable.
- New MASTERYS BC+ Flex model: the first device that adapts to the environment.
- eWIRE: mobile application for a tutored installation and commissioning.

MASTERYS BC+

Single and Three Phase UPS
from 10 to 160 kVA



<http://rb.gy/5bocg>

 **socomec**
Innovative Power Solutions



7

Solutions

- Modular UPS
- Single-phase UPS
- Three-phase UPS
- Static Transfer System (STS)
- Industrial & transformer based UPS
- UPS for Special applications
- Connected services

Phase	Product Name	Rating	Product code	Product Description	LP (₹)	
1_Phase	ITYS-E	1 kVA	ITY-E-TW010B-I	1 kVA Single phase online UPS with Built-in Battery	24800	
		2 kVA	ITY-E-TW020B-I	2 kVA Single phase online UPS with Built-in Battery	41400	
		3 kVA	ITY-E-TW030B-I	3 kVA Single phase online UPS with Built-in Battery	49100	
		1 kVA	ITY-E-TW010LB-I	1 kVA Single phase online UPS with External Battery option	21900	
		2 kVA	ITY-E-TW020LB-I	2 kVA Single phase online UPS with External Battery option	35100	
		3 kVA	ITY-E-TW030LB-I	3 kVA Single phase online UPS with External Battery option	38700	
		6 kVA	ITY-E-TW060LB	6 kVA Single phase online UPS with External Battery option	91900	
			10 kVA	ITY-E-TW100LB	10 kVA Single phase online UPS with External Battery option	119700
		NETYS RT	5 kVA	NRT3-U5000C	5 kVA Single Phase rack mountable online UPS, with External Battery Option	124900
			7 kVA	NRT3-U7000CLAC	7 kVA Single Phase rack mountable online UPS, with External Battery Option	142300
			11 kVA	NRT3-U11000CLAC	11 kVA Single Phase rack mountable online UPS, with External Battery Option	192400
	NRT cable		NRT3-OP-CBL11F	NeTYS RT Longer Battery Cable (900mm) for UPS 5 kVA to 11 kVA	8700	
3_Phase	Masterys BC+	10 kVA	U4BQ013E00-0100	10 kVA MASTERYS BC+ UPS 3/3 400V PF=1 for External Battery Cabinet	210000	
		20 kVA	U4BQ023E00-0100	20 kVA MASTERYS BC+ UPS 3/3 400V PF=1 for External Battery Cabinet	240000	
1_Phase	STATYS XS	16A	3310016001	Static Transfer Switch 16A 230V 1P 2 Wires 2 Pole Switching (19" Rack Mountable)	41100	
		32A	3310032001	Static Transfer Switch 32A 230V 1P 2 Wires 2 Pole Switching (19" Rack Mountable)	78700	
3_Phase	STATYS	63A	3230063006	Statys Pack 63A 380/415V Three Phase 4 Wires 4 Pole Switching 19 Inches Rack	580000	
		100A	3230100006	Statys Pack 100A 380/415V Three Phase 4 Wires 4 Pole Switching 19 Inches Rack	590000	
		200A	3230200006	Statys Pack 200A 380/415V Three Phase 4 Wires 4 Pole Switching Mounted in Cabinet	710000	

*Note: Online UPS available from 1 kVA to 5400 kVA, Static transfer switches (STS) available up to 1800 A. For higher rating UPS & STS, send your query to info.in@socomec.com

Load Break Switches



COMO

From 32A to 63A

Solution		OPEN EXECUTION							
		Din Rail/Black Plate				Door Mounting			
Standard Configuration Includes									
		Direct Handle Version*		External Handle Version*		External operation Version* with screw		Quick Fix Version*	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
32A	3	21113003G	910	21113103G	940	21113203G	920	21113303G	920
63A	3	21113005G	1095	21113105G	1115	21113205G	1145	21113305G	1145

* references are only for Switch

Accessories for Din Rail/Back Plate mounting



Rating	4th Pole	LP (₹)	External handle K1 with Guided Shaft IP65	LP (₹)	Extension Shaft	LP (₹)	Aux Contact NO + NC	LP (₹)	Neutral Pole	LP (₹)
32A	21111003G	315	21131112G (Blue/Black)	250	21132200G (200mm)	175	21134000G	395	21111056G	395
63A	21111005G	360	21131113G (Red /Yellow)	350	21132320G (320mm)	225				

Accessories for Door mounting



Rating	4th Pole	LP (₹)	External handle K1 type IP65	LP (₹)	External handle K1 type IP65 - Quickfix	LP (₹)	Aux Contact NO + NC	LP (₹)	Neutral Pole	LP (₹)
32A	21111203G	320	21131322G (Blue/Black)	240	21131332G (Blue/Black)	240	21134200G	410	21111256G	400
63A	21111205G	370	21131323G (Red /Yellow)		21131333G (Red/Yellow)					

Enclosed Load Break Switches

COMO


From 20A to 125A



Pole	20A		25A		32A		40A	
	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
3Pole (Yellow/Red)	21153401G	1645	21153402G	1775	21153403G	1825	21153404G	1990
3Pole (Blue/Grey)	21153301G	1580	21153302G	1710	21153303G	1755	21153304G	1915
4Pole (Yellow/Red)	21154401G	1850	21154402G	2120	21154403G	2040	21154404G	2275
4Pole (Blue/Grey)	21154301G	1775	21154302G	1915	21154303G	1970	21154304G	2190

Pole	63A		80A		100A		125A	
	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
3Pole (Yellow/Red)	21153406G	2650	21153408G	5250	21153409G	6630	21153412G	12270
3Pole (Blue/Grey)	21153306G	2550	21153308G	5050	21153309G	6390	21153312G	11815
4Pole (Yellow/Red)	21154406G	3320	21154408G	5840	21154409G	7595	21154412G	13065
4Pole (Blue/Grey)	21154306G	3190	21154308G	5620	21154309G	7315	21154312G	12580

Load Break Switches



SIRCO

From 125A to 3200A

Conforms to IS/IEC 60947-3 up to AC23A¹, Front operated 3 pole 415 V, 50 Hz.


Solution			OPEN EXECUTION				ENCLOSED SOLUTION			
			KIT Type 1		KIT Type 2		Enclosed Switch		Extension Box	
Standard Configuration Includes										
			<ul style="list-style-type: none"> - Switch - Interphase barriers from frame B3 and above - Direct Handle 		<ul style="list-style-type: none"> - Switch - Interphase barriers from frame B3 and above - External Handle - Extension Shaft 200mm 		<ul style="list-style-type: none"> - Enclosure Switch - Interphase barriers from frame B3 and above - External Handle - Extension Shaft 		<ul style="list-style-type: none"> - Suitable for Top or Bottom Assembly (Price is for 1 number of extension box) 	
Frame	Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
B3	125A	3P	26K13012A	5955	26K23012A	6475	26E13012A	9440	26E10002A	1995
	160A		26K13016A	7535	26K23016A	8060	26E13016A	11425		
	200A CD		26K13019A	7830	26K23019A	8350	26E13019A	11770		
B4	200A		26K13020A	8565	26K23020A	9075	26E13020A	12095	26E10003A	3080
	250A		26K13025A	11125	26K23025A	11650	26E13025A	15635		
	315A CD		26K13030A	11215	26K23030A	11730	26E13030A	18015		
B5	400A CD		26K13039A	13940	26K23039A	14465	26E13039A	19585	26E10004A	3920
	315A		26K13031A	13485	26K23031A	15435	26E13031A	19210		
	400A		26K13040A	16490	26K23040A	17010	26E13040A	23095		
	500A		26K13050A	19950	26K23050A	20720	26E13050A	25440		
B6	630A		26K13063A	20255	26K23063A	21425	26E13063A	27675	-	-
	800A CD	26K13079A	23535	26K23079A	24400	-	-			
B7	1000A	26K13100A	45705	26K23100A	46125	26E13100A	60355	26E10006A	11520	
	1250A CD	26K13124A	52165	26K23124A	55935	-	-	-	-	
B8	1250A	26K13125A	62475	26K23125A	62740	26E13125A	83915	26E10007A	14620	
	1600A	26K13160A	84345	26K23160A	85400	26E13160A	110600			
	1800A	26K13180A	93025	26K23180A	94610	-	-			
B8	2000A	26K13200A	104720	26K23200A	105440	-	-	-	-	
	2500A	26K13250A	144430	26K23250A	145775	-	-	-	-	
	3200A	26K13320A	193710	26K23320A	195590	-	-	-	-	

CD - Compact design

1) Please refer technical literature for exact technical characteristics

Rating 125A & 800A are also available in AC-23A category





Load Break Switches



SIRCO

From 125A to 3200A

Conforms to IS/IEC 60947-3 up to AC23A¹, Front operated 4 pole 415 V, 50 Hz.

Solution			OPEN EXECUTION				ENCLOSED SOLUTION			
			KIT Type 1		KIT Type 2		Enclosed Switch		Extension Box	
Standard Configuration Includes										
			<ul style="list-style-type: none"> - Switch - Interphase barriers from frame B3 and above - Direct Handle 		<ul style="list-style-type: none"> - Switch - Interphase barriers from frame B3 and above - External Handle - Extension Shaft 200mm 		<ul style="list-style-type: none"> - Enclosure Switch - Interphase barriers from frame B3 and above - External Handle - Extension Shaft 		<ul style="list-style-type: none"> - Suitable for Top or Bottom Assembly (Price is for 1 number of extension box) 	
Frame	Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
B2*	63A	4P	26K14006A	3380	26K24006A	3860	26E14006A	6465	26E10001A	1170
	100A		26K14010A	5795	26K24010A	6275	26E14010A	7830		
	125A CD		26K14011A	6340	26K24011A	6820	26E14011A	8750		
B3	160A		26K14016A	8860	26K24016A	9475	26E14016A	12395	26E10002A	1995
	200A CD		26K14019A	9210	26K24019A	9820	26E14019A	13305		
B4	200A		26K14020A	10070	26K24020A	10685	26E14020A	14335	26E10003A	3080
	250A		26K14025A	13090	26K24025A	13705	26E14025A	16875		
	315A CD		26K14030A	13195	26K24030A	13800	26E14030A	19700		
B5	400A CD		26K14039A	16400	26K24039A	17435	26E14039A	22635	26E10004A	3920
	315A		26K14031A	14615	26K24031A	16855	26E14031A	19795		
	400A		26K14040A	19400	26K24040A	20010	26E14040A	26860		
	500A	26K14050A	21275	26K24050A	22725	26E14050A	29500			
B6	630A	26K14063A	22935	26K24063A	24225	26E14063A	32065	-	-	
	800A CD	26K14079A	27690	26K24079A	28700	-	-			
B6	1000A	26K14100A	53770	26K24100A	54270	26E14100A	69965	26E10006A	11520	
	1250A CD	26K14124A	61365	26K24124A	61800	-	-	-	-	
B7	1250A	26K14125A	73495	26K24125A	73810	26E14125A	96660	26E10007A	14620	
	1600A	26K14160A	99230	26K24160A	99895	26E14160A	127430			
B8	1800A	26K14180A	109440	26K24180A	109910	-	-	-	-	
	2000A	26K14200A	123195	26K24200A	132095	-	-			
	2500A	26K14250A	169910	26K24250A	170920	-	-			
	3200A	26K14320A	227895	26K24320A	228755	-	-	-	-	


CD - Compact design

1) Please refer technical literature for exact technical characteristics | * Phase Barrier & Shaft is not available in frame B2

Rating 125A & 800A are also available in AC-23A category


Load Break Switches

SIRCO Accessories



Frame	Direct Handle	LP (₹)	External Handle	LP (₹)	Shaft 200mm	LP (₹)	Shaft 250mm	LP (₹)	Shaft 320mm	LP (₹)
B2	42990001A	485	-	-	-	-	-	-	-	-
B3	26995042A	485	14212111A	1550	14001020A	540	14001025A	690	14001032A	760
B4	26995052A	875	14212111A	1550	14001020A	540	14001025A	690	14001032A	760
B5	26995052A	875	14212111A	1550	14001020A	540	14001025A	690	14001032A	760
B6*	27997012A	3500	14433111A	2410	14011520A	1255	-	-	14011532A	1480
B7*	27997012A	3500	14433111A	2410	14011520A	1255	-	-	14011532A	1480
B8*	27997012A	3500	14538111A	15180	27993015A	6790	-	-	27993018A	7130

* Handle for frames B6 to B8 are double arms handle



Frame	Interphase barrier - 3P	LP (₹)	Interphase barrier - 4P	LP (₹)
B2	-	-	-	-
B3	29985033A	225	29985034A	320
B4	29985023A	265	29985024A	390
B5	29985013A	305	29985014A	440
B6	-	-	-	-
B7	-	-	-	-

Frame	1st Aux Contact (1 NO/NC)	LP (₹)	2nd Aux Contact (1 NO/NC)	LP (₹)
B2	26091020A	220	26092020A	360
B3	26990031A	540	26990032A	635
B4	26990031A	540	26990032A	635
B5	26990031A	540	26990032A	635
B6*	26990031A	540	26990032A	635
B7*	26990031A	540	26990032A	635
B8*	26990031A	540	26990032A	635



Frame	Terminal Shroud - 3P	LP (₹)	Terminal Shroud - 4P	LP (₹)	Terminal Screen Standard - 3P	LP (₹)	Terminal Screen Standard - 4P	LP (₹)
B2	-	-	29944008A	390	-	-	-	-
B3	26943014A	820	26944014A	955	26983012A	1020	26984012A	1065
B4	26943021A	915	26944021A	1090	26983020A	1020	26984020A	1065
B5	26943051A	1460	26944051A	1640	26983050A	1020	26984050A	1065
B6	-	-	-	-	26983080A	1700	26984080A	1930
B7	-	-	-	-	26983120A	2500	26984120A	2835
B8	-	-	-	-	26983200A	4490	26984200A	5085



Frame	Terminal Screen Wide - Top - 3P	LP (₹)	Terminal Screen Wide - Bottom - 3P	LP (₹)	Terminal Screen wide Top/Bottom - 4P	LP (₹)
B3	26983013A	780	26988013A	780	26984013A	880
B4	26983021A	780	26988021A	780	26984021A	880
B5	26983051A	1000	26988051A	1000	26984051A	1130
B6	26983081A	2005	26988081A	2005	26984081A	2275

Manual Transfer Switching Equipment



SIRCOVER

From 125A to 3200A

Conforms to IEC 60947-6-1 up to AC33B¹, IS/IEC 60947-3 up to AC-23A¹, Front operated 3 pole 415 V, 50 Hz.

Solution			OPEN EXECUTION				ENCLOSED SOLUTION			
			KIT Type 1		KIT Type 2		Enclosed Switch		Extension Box	
Standard Configuration Includes										
			<ul style="list-style-type: none"> - Transfer switch - Direct handle - Bridging Bars up to 1600 A - Interphase barriers from frame B3 and above 		<ul style="list-style-type: none"> - Transfer switch - Bridging Bars up to 1600 A - Extended handle - 200 mm shaft - Interphase barriers from frame B3 and above 		<ul style="list-style-type: none"> - Transfer switch - Extended handle - Bridging Bars up to 1600 A - Extension shaft - Interphase barriers from frame B3 and above 		<ul style="list-style-type: none"> - Suitable for Top or Bottom Assembly (Price is for 1 number of extension box) 	
Frame	Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
B3	125A	3P	41K13013A	10815	41K23013A	11425	41E13013A	16085	41E10002A	3370
	160A		41K13016A	11650	41K23016A	12495	41E13016A	17645		
	200A		41K13020A	14160	41K23020A	15075	41E13020A	20255		
B4	250A		41K13025A	20640	41K23025A	21735	41E13025A	28030	41E10003A	3600
	315A		41K13031A	21815	41K23031A	22945	41E13031A	29295		
	400A		41K13040A	32085	41K23040A	33515	41E13040A	42835	41E10004A	5300
B5	500A		41K13050A	34430	41K23050A	38630	41E13050A	46285	41E10005A	5675
	630A		41K13063A	37840	41K23063A	39430	41E13063A	49530		
B6	CD800A		41K13079A	51180	41K23079A	53155	-	-	-	-
	1000A		41K13100A	97055	41K23100A	100695	41E13100A	130765	-	-
B7	1250A	41K13120A	129670	41K23120A	134230	41E13120A	181700	-	-	
	1600A	41K13160A	151930	41K23160A	157120	41E13160A	246380	41E10007A	39745	
B8	2000A	41K13200A	237780	41K23200A	246270	41E13200A	317810	41E10008A	51160	
	2500A	41K13250A	317275	41K23250A	328040	41E13250A	422735			
	3200A	41K13320A	434610	41K23320A	448725	41E13320A	553170			

CD - Compact Design

1) Please refer technical literature for exact technical characteristics

Rating 800A is also available in AC-33A category

* Old Sircover from 125A-CD800A are available till stock last

Manual Transfer Switching Equipment



SIRCOVER

From 125A to 3200A

Conforms to IEC 60947-6-1 up to AC33B¹, IS/IEC 60947-3 up to AC-23A¹, Front operated 4 pole 415 V, 50 Hz.

Solution			OPEN EXECUTION				ENCLOSED SOLUTION			
			KIT Type 1		KIT Type 2		Enclosed Switch		Extension Box	
Standard Configuration Includes										
			<ul style="list-style-type: none"> - Transfer switch - Direct handle - Bridging Bars up to 1600 A - Interphase barriers from frame B3 and above 		<ul style="list-style-type: none"> - Transfer switch - Bridging Bars up to 1600 A - Extended handle - 200 mm shaft - Interphase barriers from frame B3 and above 		<ul style="list-style-type: none"> - Transfer switch - Extended handle - Bridging Bars up to 1600 A - Extension shaft - Interphase barriers from frame B3 and above 		<ul style="list-style-type: none"> - Suitable for Top or Bottom Assembly (Price is for 1 number of extension box) 	
Frame	Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
B2*	63A	4P	41K14006A	5775	41K24006A	6070	41E14006A	9575	41E10001A	2295
	100A		41K14010A	7765	41K24010A	8000	41E14010A	12205		
	CD125A		41K14011A	10015	41K24011A	10475	41E14011A	15190		
B3	125A	4P	41G14013A	11905	41G24013A	12040	41E14013A	18130	41E10002A	3370
	160A		41G14016A	12950	41G24016A	13240	41E14016A	19880		
	200A		41G14020A	15735	41G24020A	16130	41E14020A	22955		
B4	250A	4P	41G14025A	22715	41G24025A	23255	41E14025A	31920	41E10003A	3600
	315A		41G14031A	24240	41G24031A	24310	41E14031A	33405		
	400A		41G14040A	35665	41G24040A	35860	41E14040A	48840		
B5	630A	4P	41G14063A	41645	41G24063A	41780	41E14063A	56590	41E10005A	5675
	CD800A		41G14079A	57985	41G24079A	59340	-	-	-	-
B6	1000A	4P	41K14100A	105805	41K24100A	106670	41E14100A	150235	41E10006A	12625
	1250A		41K14120A	142680	41K24120A	143525	41E14120A	205730		
B7	1600A	4P	41K14160A	168800	41K24160A	169630	41E14160A	274515	41E10007A	39745
B8	2000A	4P	41K14200A	255300	41K24200A	257070	41E14200A	361900	41E10008A	51160
	2500A		41K14250A	349105	41K24250A	351015	41E14250A	481465		
	3200A		41K14320A	478215	41K24320A	480165	41E14320A	633510		

CD - Compact Design

1) Please refer technical literature for exact technical characteristics

* Phase Barrier & Shaft is not available in B2

Rating 800A is also available in AC-33A category

* Old Sircover from 125A-CD800A are available till stock last



SIRCOVER Accessories



Frame	Direct Handle	LP (₹)	External Handle	LP (₹)	Shaft 200mm	LP (₹)	Shaft 320mm	LP (₹)
B2	42990002A	555	-	-	-	-	-	-
B3	41995012A	1115	14212113A	1775	14001020A	540	14001032A	760
B4	41995012A	1115	14212113A	1775	14001020A	540	14001032A	760
B5	41995012A	1115	14212113A	1775	14001020A	540	14001032A	760
B6*	27997052A	2890	14433113A	4265	14011520A	1255	14011532A	1480
B7*	27997052A	2890	14433113A	4265	14011520A	1255	14011532A	1480
B8*	27997012A	3500	14538113A	17685	27993015A	6790	27993018A	7130

* double arms handle



Frame	Interphase barrier 3P	LP (₹)	Interphase barrier 4P	LP (₹)	1st or 2nd Aux Contact (1NO/NC)	LP (₹)	Interlock Kit*	LP (₹)
B2	-	-	-	-	42091030A	655	42590002A	790
B3	29985036A	430	29985039A	580	41090021A	685	42590003A	805
B4	29985026A	515	29985029A	690	41090021A	685	42590003A	805
B5	29985016A	595	29985019A	1030	41090021A	685	42590003A	805
B6	-	-	-	-	41090021A	685	-	-
B7	-	-	-	-	41090021A	685	-	-
B8	-	-	-	-	41090021A	685	-	-

* for external operation of Kit 1, interlock kit can be used

* for using Interlock kit in K2, direct handle to be ordered extra

Old changeover switch (COS)		Retrofit Solutions		
Rating	Reference	Switch Reference	Kit Reference	LP (₹)
125A	GC01 254POI	GC01 254POI	41RT 4020A	2415
160A	GC01 604POI	GC01 604POI	41RT 4020A	2415
200A	GC02 004POI	GC02 004POI	41RT 4020A	2415
250A	GC02 504POI	GC02 504POI	41RT 4031A	2785
315A	GC03 204POI	GC03 204POI	41RT 4031A	2785
630A	GC06 304POI	GC06 304POI	41RT 4063A	4025

* for 400 A, please consult us.

* above list price is only for retrofit kit, for switch prices please refer page no. 9

* To replace Socomec old changeover (COS), use retrofit kit along with the NEW SIRCOVER with direct handle option



SIRCOVER BYPASS

From 125A to 1600A

Conforms to IS/IEC 60947-3 AC-23A¹, front operated 4 pole 415 V, 50 Hz.

Solution		OPEN EXECUTION	
		SIRCOVER BYPASS	
Standard Configuration Includes			
		<ul style="list-style-type: none"> - Switch - Interphase barrier - External Handle - Bridging Bars - Shaft 200mm 	
Rating	Poles	Reference	LP (₹)
125A	4P	41K29013A	20580
160A		41K29016A	22710
200A		41K29019A	25800
250A		41K29025A	36930
400A		41K29039A	56065
630A		41K29063A	67585
800A		41K29080A	156960
1000A		41K29100A	203665
1250A		41K29120A	246290
1600A		41K29160A	307505

1) Please refer technical literature for exact characteristics

SIRCOVER BYPASS Accessories

Conforms to IS/IEC 60947-3 AC-23A¹, front operated 4 pole 415 V, 50 Hz.



Rating	External Handle	LP (₹)	Shaft 200mm	LP (₹)	Shaft 320mm	LP (₹)	1st Aux Contact (1NO/NC)	LP (₹)
125A	14212113A	1775	14001020A	540	14001032A	760	41090021A	685
160A	14212113A	1775	14001020A	540	14001032A	760	41090021A	685
200A	14212113A	1775	14001020A	540	14001032A	760	41090021A	685
250A	14333113A	3410	14011520A	1255	14011532A	1480	41090021A	685
400A	14333113A	3410	14011520A	1255	14011532A	1480	41090021A	685
500A	14333113A	3410	14011520A	1255	14011532A	1480	41090021A	685
630A	14333113A	3410	14011520A	1255	14011532A	1480	41090021A	685
1250A	41997146A	20195	27993015A	6790	27993018A	7130	41090021A	685
1600A	41997146A	20195	27993015A	6790	27993018A	7130	41090021A	685

When it comes to transfer switching equipment, opt for reliability



from 40 to 6300 A



ATyS: a complete range of transfer switching equipment for every application from 40 to 6300 A



ATyS is remotely operated or fully automatic transfer switching equipment (TSE) assures the continuity of power to a load in a safe and reliable way.

- **Wider range of ATyS** products for different applications. With or without dual power supply, ATyS controller, Communication, Software and more.
- **Tested in full compliance** with IEC 60947-6-1 & IEC 60947-3.
- **Unique lateral movement design** with self cleaning contacts ensure high performance and power availability.
- **Wide band control voltage** 166 - 332 V for motor.
- **Self diagnostic watchdog relay** for the motor and controller.
- **3-positions (I-0-II) pad lockable** with 100% manual on-load transfer feasibility with operating handle.



Safe



Plug & play



Robust



Easy maintenance



<http://rb.gy/ugk6w>

socomec
Innovative Power Solutions

Remote & Automatic Operated Transfer Switching Equipment



ATyS S

From 40A to 125A




Conforms to IEC 60947-6-1, IS/IEC 60947-3

Solution		Remotely Operated							
		ATyS S		ATyS Sd		ATyS S 12Vdc		ATyS S 24/48Vdc	
Standard Configuration Includes									
		<ul style="list-style-type: none"> - Switch - Handle - Bridging Bars 		<ul style="list-style-type: none"> - Switch - Handle - Bridging Bars - Dual Power Supply 		<ul style="list-style-type: none"> - Switch - Handle - Bridging Bars 		<ul style="list-style-type: none"> - Switch - Handle - Bridging Bars upto 1600A 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
40A	4P	95034004SL	26665	95134004SL	29595	95054004SL	26665	95064004SL	26665
63A		95034006SL	28155	95134006SL	30940	95054006SL	27880	95064006SL	27880
80A		95034008SL	30300	95134008SL	33635	95054008SL	30300	95064008SL	30300
100A		95034010SL	34265	95134010SL	37665	95054010SL	33930	95064010SL	33930
125A		95034012SL	36715	95134012SL	40360	95054012SL	36360	95064012SL	36360

ATyS M

From 40A to 160A

Conforms to IEC 60947-6-1, IS/IEC 60947-3

Solution		Automatic Transfer Switch Equipment (ATSE)					
		ATyS t M		ATyS g M		ATyS p M + COM	
Image = 4P B4 Frame							
Standard Configuration Includes		<ul style="list-style-type: none"> - Switch - Handle 		<ul style="list-style-type: none"> - Switch - Handle 		<ul style="list-style-type: none"> - Switch - Handle - With RS 485 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
40A	4P	93444004G	49155	93544004G	On Request	93844004G	On Request
63A		93444006G	52420	93544006G	On Request	93844006G	On Request
80A		93444008G	55215	93544008G	On Request	93844008G	On Request
100A		93444010G	56615	93544010G	On Request	93844010G	On Request
125A		93444012G	62555	93544012G	On Request	93844012G	On Request
160A		93444016G	76190	93544016G	On Request	93844016G	On Request

* Please consult us, for 2Pole ATyS M

* Bridging bars available as optional



ATyS

From 125A to 6300A

Conforms to IEC 60947-6-1, IEC 60947-3

Solution		Remotely Operated	
		ATyS r	
Standard Configuration Includes			
		<ul style="list-style-type: none"> - Switch - Handle - Bridging Bars up to 1600A 	
Rating	Poles	Reference	LP (₹)
125A	4P	95234012SL	68480
160A		95234016SL	70235
200A		95234020SL	71910
250A		95234025SL	89715
315A		95234031SL	91100
400A		95234040SL	113355
500A		95234050SL	121700
630A		95234063SL	143955
800A		95234080SL	196370
1000A		95234100SL	246090
1250A		95234120SL	305265
1600A		95234160SL	378870
2000A		95234200G	553245
2500A		95234250G	611495
3200A		95234320G	786155

ATyS d H			
			
Rating	Poles	Reference	LP (₹)
4000A	3P	95333400G	On Request
	4P	95334400G	On Request
5000A	3P	95333500G	On Request
	4P	95334500G	On Request
6300A	3P	95333630G	On Request
	4P	95334630G	On Request



ATyS

From 125A to 6300A

Conforms to IEC 60947-6-1, IEC 60947-3

Solution		Automatically operated					
		ATyS A		ATyS C		ATyS P	
Standard Configuration Includes							
		<ul style="list-style-type: none"> - Switch - Handle - Controller with Harness - Bridging Bars upto 1600A - Voltage Sensing Kit 		<ul style="list-style-type: none"> - Switch - Handle - Controller with RS 485 port with Harness - Bridging Bars upto 1600A - Voltage Sensing Kit 		<ul style="list-style-type: none"> - Switch - Handle - Bridging Bars up to 1600A - Voltage Sensing Kit 	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
125A	4P	95154012SL	96905	95254012SL	On Request	95734012SLVR	On Request
160A		95154016SL	98695	95254016SL	On Request	95734016SLVR	On Request
200A		95154020SL	100400	95254020SL	On Request	95734020SLVR	On Request
250A		95154025SL	118555	95254025SL	On Request	95734025SLVR	On Request
315A		95154031SL	119975	95254031SL	On Request	95734031SLVR	On Request
400A		95154040SL	142675	95254040SL	On Request	95734040SLVR	On Request
500A		95154050SL	151190	95254050SL	On Request	95734050SLVR	On Request
630A		95154063SL	173880	95254063SL	On Request	95734063SLVR	On Request
800A		95154080SL	227620	95254080SL	On Request	95734080SLVR	On Request
1000A		95154100SL	276595	95254100SL	On Request	95734100SLVR	On Request
1250A		95154120SL	336350	95254120SL	On Request	95734120SLVR	On Request
1600A		95154160SL	410690	95254160SL	On Request	95734160SLVR	On Request
2000A		95154200G	586785	95254200	On Request	95734200VR	On Request
2500A		95154250G	643165	95254250	On Request	95734250VR	On Request
3200A		95154320G	822005	95254320	On Request	95734320VR	On Request

* Please contact us for 3Pole ATyS range * ATyS P - Optional RS485 & Ethernet Module

When **energy** matters



Enclosed ATyS

Ranging from 40 - 800 A

The choice of OEM and end users

- All-in-one solution, avoiding assembly issues
- Mechanical interlock providing isolation between sources
- Padlocking for safe maintenance operation
- Fire input Alarms and Genset Start/Stop
- Continuous product availability information
- Manual operation possible under load



<https://rb.gy/4jtss>



Enclosed ATyS

From 40A to 800A

Solution		Automatic Transfer Switch Equipment (ATSE)	
		ENCLOSED SOLUTION	
Standard Configuration Includes			
		<ul style="list-style-type: none"> - Switch - A15 Controller 	
Rating	Poles	Reference	LP (₹)
40A	4P	87154004	72640
63A		87154006	74045
80A		87154008	76070
100A		87154010	79810
125A		87154012	82120
160A		87154016	106590
200A		87154020	108170
250A		87154025	126300
315A		87154031	131945
400A		87154040	152940
630A		87154063	178660
800A		87154080	273250



ATyS Accessories



References	Description	LP (₹)
95992010G	HMI ATyS D10 compatible with ATyS d, t, g, p	8680
95992020G	HMI ATyS D20 compatible with ATyS p, ATyS p M	9770
13094006G	Bridging bars 40A - 125A for ATyS M	4965
13094016G	Bridging bars 160A for ATyS M	9555
13091001G	1st Auxiliary contact 40 - 160 A for ATyS M with 1 C/O contact for position I,0&II	4875
13994006G	Voltage sensing tap for ATyS M	4085
22944016G	Terminal Shrouds for ATyS M	965
48250204G	Ethernet Module with RS 485 for ATyS p/Diris A30/41 (Modbus gateway)	43065
48250203G	Ethernet Module for ATyS p/Diris A30/41 (MODBUS TCP or RTU over TCP protocol)	22615
48250092G	RS 485 Modbus Communication for ATyS p/Diris A40/41	5615
15992001G	2 Inputs/ Output modules for ATyS p	10130
15994001G	Dual Power Supply for ATyS S & ATyS r	16175

ATyS Controllers



References	Description	LP (₹)
16000015	ATyS Controller A15 for RTSE products	22955
16000025	ATyS Controller C25 with Rs485 Com for RTSE products	On Request

Universal ATS Controller



References	Description	LP (₹)
16000055	Controller C55 suitable for PC / CB / CC type Technologies with RS485 Com	On Request
16000065	Controller C65 suitable for PC / CB / CC type Technologies with RS485 Com or Ethernet/Webview *	On Request

*by Using gateway device M70/D70

Optimise your energy performance with **Socomec**



Metering

Measure

Centralise / Monitor / Analyse

Measurement and monitoring multi-circuit system
DIRIS Digiware



Measurement and monitoring multi-circuit system
DIRIS Digiware



Digital Multifunction Power meter
MULTIS M-18



Communication gateway
DIRIS M & D



Single & Three phase energy meters
COUNTIS M & E



DIRIS A



Electrical network analyser
DIRIS Q800



Energy management software
WEBVIEW



PreciSense



Discover the video



VirtualMonitor



Discover the video



AutoCorrect



Discover the video

When **energy** matters



DIRIS Digiware BCM

Multi-circuit current acquisition module
with integrated sensors

The DIRIS Digiware BCM allows
the monitoring of all types of power
distribution units (PDUs).

- 3x quicker to install than standard solutions
- 2x quicker to configure than standard solutions
- Minimal footprint
- Maximum reliability



<http://rb.gy/ee0kx>

socomec
Innovative Power Solutions



COUNTIS (LCD Display)



References	Description	LP (₹)
48503058G	COUNTIS E00 1PH,Direct 40A,Active Energy Meter,1 Module width(18 mm) with vertical LCD display	7490
48503039G	COUNTIS E03 1PH,Direct 40A,Active Energy Meter,1 Module width(18 mm) with vertical LCD display with MODBUS	9825
48503043G	COUNTIS E13 1PH Direct 80A,Dual tariff, Active Energy Meter with MODBUS	23225
48503047G	COUNTIS E17 1PH Direct 80A,Dual tariff, Active Energy Meter with Ethernet	38785
48503062G	COUNTIS E21 3PH Direct 80A Dual tariff, Active Energy Meter with pulse output	17735
48503050G	COUNTIS E23 3PH Direct 80A,Dual tariff, Active Energy Meter with MODBUS	30975
48503054G	COUNTIS E27 3PH Direct 80A,Dual tariff, Active Energy Meter with Ethernet	52255
48503005G	COUNTIS E30 3PH Direct 100A,Active Energy Meter with pulse output	21140
48503006G	COUNTIS E31 3PH Direct 100A Dual tariff, Active Energy Meter with pulse output	21520
48503012G	COUNTIS E33 3PH Direct 100A,Dual tariff, Active Energy Meter with MODBUS	33430
48503063G	COUNTIS E41 3PH Dual Tariff Active Energy Meter via CT/5A upto 6000 A	16245
48503065G	COUNTIS E43 Dual Tariff Active Energy Meter via CT/5A upto 6000 A & with RS485	29180
48530000G	COUNTIS ECi2 Multi-Utility Pulse concentrator With upto 7 Insulated Logical inputs	31175
48530001G	COUNTIS ECi3 Multi-Utility Pulse concentrator With upto 7 Insulated Logical inputs+ 2 Analog inputs	35850

Active Energy Meter : Countis 'M' Series



References	Description	LP (₹)
48C03018G	M03 1phase 45A direct - with Modbus communication via RS485; I,V,P,Q,S ,PF & 2Pulse Output CI:1.0	7305
48C03019G	M13 1Phase 100 A direct - with MODBUS communication via RS485; I,V,P,Q,S ,PF & 2Pulse Output CI:1.0	7505
48C03020G	M33 3Phase 100 A direct - with MODBUS communication via RS485; I,V,P,Q,S ,PF,load curves and THD & 2 Pulse Output CI:1.0	11510
48C03021G	M43 3Phase CT 5A input with RS485 MOSBUS communication; I,V,P,Q,S ,PF,load cuves and THD & 2 Pulse Output CI:1.0	12760

Digital Multifunction Power meter : MULTIS M-18



References	Description	LP (₹)
192J9060	Multis M-18, class 0.5s, LCD screen, U, V, I, F, P, Q, S, PF, KWH, KVARH, THD V & I, Min Max values, Imp Exp, with RS 485	9320

DIRIS (with LCD multiline display with accuracy class upto 0.2s)



References	Description	LP (₹)
48250400G	DIRIS A10 W/O RS485,class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, THDi & V, Dual source	16930
48250401G	DIRIS A10 With RS485,class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, THDi & V, Dual source	20495
48250402G	DIRIS A20,class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, max kW, kVA, kVAR, THDi & V up to 50th row	17875
48250080G	1 OUT A20 module	4230
48250082G	RS485 A20 module	4390



DIRIS (with LCD multiline display with accuracy class upto 0.2s)



References	Description	LP (₹)
48250403G**	DIRIS A30, class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, kVAh, max & Avg(I, V, PF, kW, kVA, kVAR), THDi, V & I up to 63 rd row, 3ph current bar graph	21810
48250500G*	Diris A40 RS485, 3I 2O, CI 0.2, V, I, F, P, Q, S, PF, kWh, kVARh, kVAh, max & Avg(I, V, PF, kW, kVA, kVAR), THDi, V & I up to 63 rd row, PQM Device for Voltage Sag, Swell & Current rise recordings	46835
48250501G*	Diris A40 Ethernet, 3I 2O, CI 0.2, V, I, F, P, Q, S, PF, kWh, kVARh, kVAh, max & Avg(I, V, PF, kW, kVA, kVAR), THDi, V & I up to 63 rd row, PQM Device for Voltage Sag, Swell & Current rise recordings, webview function inbuilt	56055
48250502G*	Diris A40 Profibus, 3I 2O, CI 0.2, V, I, F, P, Q, S, PF, kWh, kVARh, kVAh, max & Avg(I, V, PF, kW, kVA, kVAR), THDi, V & I up to 63 rd row, PQM Device for Voltage Sag, Swell & Current rise recordings	57725
48250404G	DIRIS A41, features same as DIRIS A30 + actual neutral current measurement through 4th CT	41030
48250207G	DIRIS A 60, features same as DIRIS A30 + PQM Device for Voltage Sag, Swell & Current rise recordings	79130
48250090G	2 Pulse A30/A41 module	4195
48250092G	RS 485 Modbus Communication for ATyS p/Diris A30/41	5615
48250093G	2 0/4-20mA Analog Output module A30/A41	10775
48250094G	2IN/2OUT A30/A41 module for alarm/trip purposes for Max V, I, F, P, Q, S, Temp, THD, V & I parameters	7785
48250097G	MEMORY A30/A41 module with RTC & with storage for P+, P-, Q+, Q-, last Max/Min values for V, I, F, P, Q, THD, V & I	16610
48250203G	Ethernet Module for ATyS p/Diris A30/41 (MODBUS TCP or RTU over TCP protocol)	22615
48250204G	Ethernet Module with RS 485 for ATyS p/Diris A30/41 (Modbus gateway)	43065
48250205G	PROFIBUS-DP A30 module	20185
48250206G	Temperature module - Temp indication (Internal+3 External sensors PT 100)	18915

* Mandatory to choose RJ12 cables & Adaptor Sensors with A40 meter for CT connections

** Upto max 4 modules possible & in that upto 3 nos, 2IN/2OUT & for balance modules max 1 no. can be fitted.

DIRIS Q800



References	Description	LP (₹)
48260100G	Diris Q800 Electrical network analyser with 192 x 144 mm color touchscreen for power quality/flicker/transient measurements/current waveform/Fresnel diagram	On request


DIRIS M

RS 485 to Ethernet communication gateways



References	Description	LP (₹)
48290221G	M50 : Multi-Protocol ethernet gateway	On request
48290222G	M70 : Multi-protocol ethernet gateway with embedded WEBVIEW-M web server	

Architecture

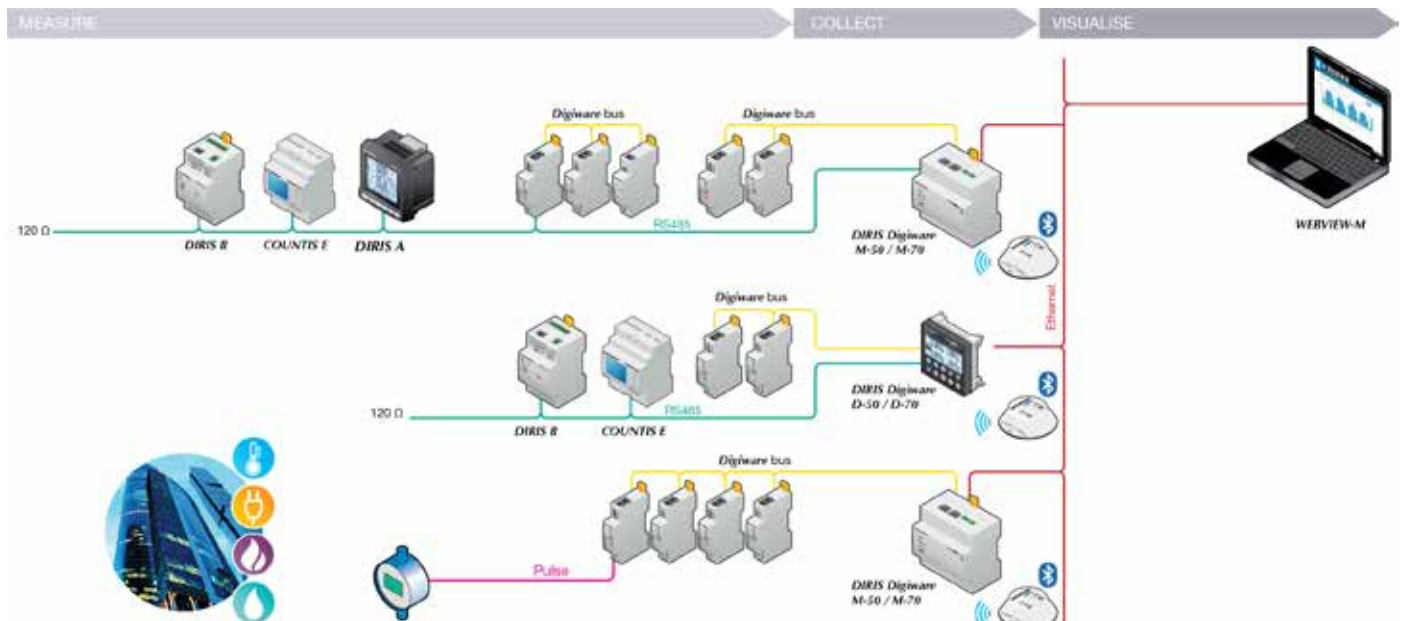



Digiware BCM



References	Description	LP (₹)
48290165	18 current inputs (18mm pitch)	On request
48290166	18 current inputs (18mm pitch) + Virtual Monitor	
48290167	21 current inputs (19mm pitch)	
48290168	21 current inputs (19mm pitch + Virtual Monitor)	

DIRIS Digiware

Monitoring Devices & Modules



References	Description	LP (₹)
48290010G	DIRIS B-10 RS485-MODBUS-230VAC	On request
48290000G	DIRIS B-30 RS485-MODBUS-230VAC	
48290030G	DIRIS O-iod DIGITAL MODULE	
48290031G	DIRIS O-iaa 0/4-20mA MODULE	
48290032G	DIRIS O-it TEMPERATURE MODULE	
48290033G	DIRIS O-m MODBUS RS485 MODULE	
48290034G	DIRIS O-p PROFIBUS DP MODULE	

Power Supply



References	Description	LP (₹)
48290120G	P15 AUX SUPPLY 100-240VAC->24 VDC 15W	On request
47290603G	P30 Aux Supply 100-240VAC - > 24VDC 20W	

Diris Digiware Input/Output Modules



References	Description	LP (₹)
48290140G	IO-10- 4 digital inputs/2 output module	On request
48290145G	IO-20 - 2 analogue input module	

Display



References	Description	LP (₹)
48290200G	DIRIS D-30 Single-point display	On request
48290204G	DIRIS D-50 Multi-point display - Ethernet output	
48290203G	DIRIS D-70 Multi-point display - Webview Webserver - Ethernet output	

Blind Interface & Repeater



References	Description	LP (₹)
48290101G	C-31 SYSTEM INTERFACE	On request
48290103G	C-32 REPEATER	

Voltage Sensing Module



References	Description	LP (₹)
48290105G	U-10 VOLTAGES INPUTS METERING	On request
48290102G	U-30 VOLTAGES INPUTS ANALYSIS	



Closed Type Current Sensor



References	Description	LP (₹)
48290500G	TE-18 20A SOLID CORE	On request
48290501G	TE-18 63A SOLID CORE	
48290502G	TE-25 160A SOLID CORE	
48290503G	TE-35 250A SOLID CORE	
48290504G	TE-45 630A SOLID CORE	
48290505G	TE-55 1000A SOLID CORE	
48290506G	TE-90 2000A SOLID CORE	

Open Type Current Sensor



References	Description	LP (₹)
48290555G	Split core - TR-10 - 25- 63A	On request
48290556G	Split core - TR-14 - 40 -160A	
48290557G	Split core - TR-21 - 63-250A	
48290558G	Split core - TR-32- 160 - 600A	

Current Sensing Module



References	Description	LP (₹)
48290110G	I-30 3xl METERING	On request
48290111G	I-31 3xl METERING + TREND	
48290112G	I-60 6xl METERING	
48290113G	I-61 6xl METERING + TREND	
48290130G	I-35 3xl ANALYSIS	
48290129G	I-43 4xl MONITORING 2I/2O	
48290131G	I-45 4xl ANALYSIS 2I/2O	

Flexible Current Sensor



References	Description	LP (₹)
48290573G	TF-40 100 - 400A	On request
48290570G	TF-55 150 - 600A	
48290574G	TF-80 150 - 600A	
48290575G	TF-120 400 - 2000A	
48290576G	TF-200 600 - 4000A	
48290577G	TF-300 1600 - 6000A	
48290578G	TF-600 1600 - 6000A	

RJ45 Cables



References	Description	LP (₹)
48290181G	RJ45-0.32 feet / 0.10m CABLE	On request
48290188G	RJ45-0.64 feet / 0.20m CABLE	
48290182G	RJ45-1.64 feet / 0.50m CABLE	
48290183G	RJ45-3.28 feet / 1m CABLE	
48290184G	RJ45-6.56 feet / 2m CABLE	
48290186G	RJ45-16.4 feet / 5m length CABLE	
48290187G	RJ45-32.8 feet / 10m length CABLE	
48290185G	RJ45 cables for BUS Digiware 164 feet / 50 m + 100 connectors	



RJ12 Cables



References	Description	LP (₹)
48290580G	RJ12 3x0.1m CABLE	On request
48290581G	RJ12 3x0.2m CABLE	
48290582G	RJ12 3x0.3m CABLE	
48290583G	RJ12 3x1m CABLE	
48290584G	RJ12 3x2m CABLE	
48290588G	RJ12 4x1m CABLE	
48290589G	RJ12 4x2m CABLE	
48290590G	RJ12 6x0.1m CABLE	
48290591G	RJ12 6x0.2m CABLE	
48290592G	RJ12 6x0.3m CABLE	
48290593G	RJ12 6x1m CABLE	
48290594G	RJ12 6x2m CABLE	
48290595G	RJ12 3x0.5m CABLE	
48290596G	RJ12 4x0.5m CABLE	
48290597G	RJ12 6x0.5m CABLE	
48290602G	RJ12 1 cable of 16.6ft/5m	
48290603G	RJ12 1 cable of 32.8ft/10m	
48290601G	RJ12 1 Cable of 164ft/50m and 100 connectors	

Accessories




References	Description	LP (₹)
48290049G	SEALING KIT DIRIS B30	On request
48290050G	USB CONFIGURATION CABLE	
48290180G	END LINE RESISTANCE Rj45	
48290598G	SPLICE PLATE x30	
48290599G	CT/5A to 100 MV ADAPTOR	
48290600G	SEALABLE COVER x20	
48290280G	RJ9 1x1,5m	
48290281G	RJ9 1x3m	

Available till stock lasts


Load Break Switches (LBS)

Conforms to IS/IEC 60947-3 AC-23A1,
Front operated 4 pole 415 V, 50 Hz

Solution		OPEN EXECUTION	
Standard Configuration Includes		 <ul style="list-style-type: none"> - Switch - Inter Phase Barriers ≥800A - Direct Handle - Door Interlock - 1st Aux Contact ≥250A 	
250A	4P	GL02504POI	11604
320A		GL03204POI	12495
400A		GL04004POI	17365
630A		GL06304POI	20932
1000A		GL10004POI	47670

Changeover switches (COS)

Conforms to IS/IEC 60947-3, AC-23A1,
Front operated 4 pole 415 V, 50 Hz

Solution		OPEN EXECUTION	
Standard Configuration Includes		 <ul style="list-style-type: none"> - Switch - Handle - Bridging Bars - Door Interlock Assembly - Phase Barrier ≥800A - 1st Aux Contact ≥ 250A 	
1000A	4P	GC10004POI	107604

MULTIS "m" Series(LED/LCD display)



References	Description	LP (₹)
192J9013G	Multis Vm15 1ph, 1L, CL1 Prg	1173
192J9014G	Multis Vm15 1ph, 1L, CL1	1020
192J9103G	Multis Lm42 LCD AC Kwh CL1	3621
192J9111G	Multis Lm45 3Ph/3L MFM CL1	7650
192J9112G	Multis Lm46 3Ph/3L MFM CL1 Com	8486
192J9113G	Multis Lm42 LCD AC-Kwh CL1 Com	4307
192J9200G	Multis L55 MFM THD CL1 Com	14053