

# VRAJ LINK

**AUTHORIZED DEALER & DISTRIBUTORS**

PRICE LIST

Address :- Shop No. 17, Opp. Electric Crematorium, 66/74 Chandan Wadi, Marine Lines (E), Mumbai - 400002

Solutions for Power Switching, Power Monitoring and Power Conversion

[vrajlink.com](http://vrajlink.com)

16<sup>th</sup> February 2026



When **energy** matters

 **socomec**  
Innovative Power Solutions

**OFFICE WHATSAPP NUMBER : 9223310978**

When **energy** matters



### Ensuring the availability of high quality power

- Static uninterruptible power supplies (UPS) for high quality power free of distortions and interruptions occurring on the primary power supply,
- Changeover of static, high availability sources for transferring the supply to an operational back-up source,
- Permanent monitoring of the electrical facilities to prevent failures and reduce operating losses.

[vrajlink07@gmail.com](mailto:vrajlink07@gmail.com)

 **socomec**  
Innovative Power Solutions

## Power Conversion Products

Single Phase and Three Phase UPS & Static Transfer Switches .....	5
---	---

## Power Switching Products

Load Break Switches -COMO .....	7
Enclosed Load Break Switches - COMO .....	8
Load Break and Isolation Switches - SIRCO .....	11
Load Break Switches for Photovoltaic Applications .....	14
Local Visible Cut-off Switches for the Heavy Industries .....	15
Load Break Switches for Direct Current Applications .....	17
Fuses for Energy Storage Applications.....	18
Transfer Switching Equipment (Manual).....	22
Transfer Switching Equipment (Remote/Automatic) .....	27
Enclosed Automatic Transfer Switching Equipment.....	37
ATS Controller .....	38

## Energy measurement & management

Single Phase & Three phase Energy Meters.....	45
Digital Multifunction Power Meter .....	47
Multifunction Measurement and Monitoring Unit - PMD.....	48
Integrated Technologies .....	54
Selection Guide-power Monitoring System AC .....	56
Multi-protocol Communication Gateways.....	57
Multi-circuit Current Acquisition Module with Integrated Sensors for Power Distribution Units (PDU).....	58
Multi-circuit Metering & Measurement-Monitoring Devices & Modules .....	59
Discontinued Products .....	63

Socomec India- Terms and Conditions.....	65
Our Service Partners.....	65



When **energy** matters



**ITYS E**  
UPS from 1 to 10 kVA

### Affordable and reliable power protection

- True online double conversion (VFI) ensures high availability and total load protection.
- Constant voltage and frequency regulation adapts to different environments, applications, and GenSets.
- Wide input voltage tolerance extends battery life by minimizing unnecessary switchovers.
- Automatic bypass protects loads during overloads or faults, ensuring continuous operation.

# Power Conversion

# 7 Solutions

- Modular UPS
- Single-phase UPS
- Three-phase UPS
- Static Transfer System (STS)

- Industrial & transformer based UPS
- UPS for Special applications
- Connected services

## Online UPS | Static Transfer Switch(STS)

HSN Code(UPS): 85044090 | HSN Code(STS): 85369090

Phase	Product Name	Rating	Product code	Product Description	LP (₹)
1_Phase	ITYS-E	1 kVA	ITY-E-TW010B-I	1 kVA Single phase online UPS with Built-in Battery	26717
		2 kVA	ITY-E-TW020B-I	2 kVA Single phase online UPS with Built-in Battery	44512
		3 kVA	ITY-E-TW030B-I	3 kVA Single phase online UPS with Built-in Battery	51530
		1 kVA	ITY-E-TW010LB-I	1 kVA Single phase online UPS with External Battery option	23242
		2 kVA	ITY-E-TW020LB-I	2 kVA Single phase online UPS with External Battery option	38858
		3 kVA	ITY-E-TW030LB-I	3 kVA Single phase online UPS with External Battery option	43478
		6 kVA	ITY-E-TW060LB	6 kVA Single phase online UPS with External Battery option	84637
		10 kVA	ITY-E-TW100LB	10 kVA Single phase online UPS with External Battery option	133541
3_Phase	Masterys BC+	10 kVA	U4BQ013E00-0100	10 kVA MASTERYS BC+ UPS 3/3 400V PF=1 for External Battery Cabinet	246775
		20 kVA	U4BQ023E00-0100	20 kVA MASTERYS BC+ UPS 3/3 400V PF=1 for External Battery Cabinet	328995
1_Phase	STATYS XS	16A	3310016001	Static Transfer Switch 16A 230V 1P 2 Wires 2 Pole Switching (19" Rack Mountable)	47759
		32A	3310032001	Static Transfer Switch 32A 230V 1P 2 Wires 2 Pole Switching (19" Rack Mountable)	95652
3_Phase	STATYS	63A	3230063006	Statys Pack 63A 380/415V Three Phase 4 Wires 4 Pole Switching 19 Inches Rack	1311381
		100A	3230100006	Statys Pack 100A 380/415V Three Phase 4 Wires 4 Pole Switching 19 Inches Rack	1421522

\*Note: Online UPS available from 1 kVA to 5400 kVA, Static transfer switches (STS) available up to 1800 A. For higher rating UPS & STS, send your query to info.in@socomec.com



When **energy** matters



**COMO**  
Load Break Switches  
from 32A to 63A



**COMO**  
Enclosed Load Break Switches  
from 20A to 125A

### Optimize your setup with our Compact load break switches

- Easy assembly: Optimise integration and save time
- Enhanced Safety: Providing a secure and reliable lock for your setup.
- Compact Design: Maximize your panel space



Scan to know more


# COMO

## Load Break Switches

From 32A to 63A



COMO  
Direct operation



COMO  
External operation

### Advantages

#### Easy mounting

Three mounting possibilities are available for optimum integration and time saving:

- DIN rail or back plate mounting,
- Door mounting,
- "Quick Fix" mounting to save time when integrating in high quantities.

### Function

COMO are compact and modular load break switches. They make and break under all types of load conditions and provide safe isolation for any low voltage circuit, especially for machine control circuits.

### General characteristics

- 2 stable positions (I, 0)
- Double break per phase
- Positive contact indication
- Contact point technology
- Padlocking in 0 position
- IP20 devices and accessories

### Compact

Thanks to its compact design panel space is really reduced.

### Safety

- Direct access to connection terminals for adequate tightening
- Lockable rotary operating mechanism

### Din Rail/Back Plate Mounting

HSN Code: 85365010

Solution	OPEN EXECUTION								
	Din Rail/Black Plate				Door Mounting				
Standard Configuration Includes									
	Direct Handle Version*		External Handle Version*		External operation Version* with screw		Quick Fix Version*		
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
32A	3	21113003	1742	21113103	1770	21113203	1962	21113303	1936
63A	3	21113005	1802	21113105	1810	21113205	1988	21113305	1982

\* references are only for Switch

### Accessories for Din Rail/Back Plate mounting

HSN Code: 85381090



4th Pole



External handle K1



Extension Shaft



Aux Contact NO + NC



Neutral Pole

Rating	4th Pole	LP (₹)	External handle K1 with Guided Shaft IP65	LP (₹)	Extension Shaft	LP (₹)	Aux Contact NO + NC	LP (₹)	Neutral Pole	LP (₹)
32A	21111003	694	21131112 (Blue/Black)	590	21132200 (200mm)	350	21134000	840	21111056	758
63A	21111005	758	21131113 (Red /Yellow)	936	21132320 (320mm)	546				

### Accessories for Door mounting

HSN Code: 85381090

Rating	4th Pole	LP (₹)	External handle K1 type IP65	LP (₹)	External handle K1 type IP65 - Quickfix	LP (₹)	Aux Contact NO + NC	LP (₹)	Neutral Pole	LP (₹)
32A	21111203	720	21131322 (Blue/Black)	412	21131332 (Blue/Black)	494	21134200	764	21111256	630
63A	21111205	798	21131323 (Red /Yellow)		21131333 (Red/Yellow)	526				

# COMO

## Enclosed Load Break Switches

From 20A to 125A



20, 32, 40 A, 3/4 poles,  
IEC Polycarbonate



32, 63, 80, 100 A, 3/4/6/8 poles,  
IEC Polycarbonate

### Function

COMO are load break switches that will make and break on load and provide isolation for any low voltage electrical circuit. COMO are now available in enclosed version incorporating three, four, six and eight-pole manually operated load break switches.

The new enclosed COMO provide protection against contact with live parts as well as environmental factors such as dust, water and other hazards.

### Advantages

#### Compact design

The enclosed COMO range offers compact enclosures tailored to your needs. The range starts with the 20A enclosure with dimensions of only 64x74.5 mm (2.5x2.93 in).

#### IP65

The IP65 protection degree provides protection against dust and high pressure water jets for any industrial application. Available in IP67 for the enclosed COMO 20A.

#### Safety of operations

Triple locking of the handle in the OFF position to ensure maximum safety for operators during maintenance operations.

#### Wide range

The range offers a wide variety of variants depending on the number of poles, rating and enclosure type.

### Enclosed Load Break Switches for 3 Pole & 4 Pole

HSN Code: 85365010

Pole	20A		25A		32A		40A	
	Reference	LP (₹)						
3Pole (Yellow/Red)	21153401	2590	21153402	3378	21153403	3526	21153404	3418
3Pole (Blue/Grey)	21153301	2488	21153302	3328	21153303	3466	21153304	3488
4Pole (Yellow/Red)	21154401	2912	21154402	4126	21154403	4322	21154404	3842
4Pole (Blue/Grey)	21154301	2794	21154302	4282	21154303	4204	21154304	4576

Pole	63A		80A		100A		125A	
	Reference	LP (₹)						
3Pole (Yellow/Red)	21153406	5304	21153408	8264	21153409	12144	21153412	26362
3Pole (Blue/Grey)	21153306	4100	21153308	8464	21153309	10724	21153312	24344
4Pole (Yellow/Red)	21154406	6644	21154408	9192	21154409	11954	21154412	24224
4Pole (Blue/Grey)	21154306	7034	21154308	9892	21154309	11724	21154312	27768



When **energy** matters



**SIRCO**  
Direct Handle



**SIRCO**  
External Handle

**SIRCO**  
Load break and isolation switches  
from 63A to 5000A

### A complete range for protection and security of your AC LV installations

- SIRCO are manually operated 3 and 4 pole load break and isolation switch rated from 63A to 5000A at 415 VAC heavy duty applications up to AC 23 A utilization category.
- It is a multipolar switch that make and break under full load and provide safety isolation in compliance with IS/ IEC 60947-3.
- Double positive break indication given through a position indication window and by the operating handle.
- Severe utilization categories and high resistance to damp and heat.

# SIRCO

## Load Break and Isolation Switches

From 63A to 5000A

# vrajlink.com



**SIRCO**  
Direct Handle



Enclosed Switch



**SIRCO**  
External Handle



Extension Box

### Function

SIRCO are manually operated load break and isolation switches. They make and break under load conditions and provide safe isolation. SIRCO are designed for 415 VAC electrical circuits.

### General characteristics

- Double positive break indication given through a position indication window, located directly on the product, and by the operating handle.
- Severe load duty categories (AC-22 and AC-23).

# vrajlink07@gmail.com

### Advantages

#### Reliability and performance

The double breaking per pole, achieved through its sliding bar contact system, is a proven design that offers very high durability and short-circuit withstand. It provides an improved breaking performance with quick opening and rapid closure.

#### Safety of property and personnel

The position indicator is located directly on the sliding bar contact mechanism, ensuring it can be seen in all circumstances. The use of glass fibre reinforced polyester gives the SIRCO both high mechanical and thermal resistance.

#### Simplicity

The SIRCO range is available as a kit with direct or external handles or as a bare switch product. It includes a wide choice of common accessories that enable:

- Simple installation.
- Reduced stock management and storage costs.

#### Easy to install

The design of external contacts enables an easy connection thanks to:

- Low profile,
- Wide terminals,
- Spreader accessories which facilitate connections with larger cables, up to 1250A.

# vrajlink07@gmail.com

### SIRCO - 3 Pole

HSN Code: 85365010

Conforms to IS/IEC 60947-3 up to AC23A<sup>1</sup>, Front operated, 415 V, 50 Hz

Solution		OPEN EXECUTION				ENCLOSED SOLUTION				
		KIT Type 1		KIT Type 2		Enclosed Switch		Extension Box		
Standard Configuration Includes										
		<ul style="list-style-type: none"> <li>- Switch</li> <li>- Interphase barriers from frame B3 and above</li> <li>- Direct Handle</li> </ul>		<ul style="list-style-type: none"> <li>- Switch</li> <li>- Interphase barriers from frame B3 and above</li> <li>- External Handle</li> <li>- Extension Shaft 200mm</li> </ul>		<ul style="list-style-type: none"> <li>- Enclosure Switch</li> <li>- Interphase barriers from frame B3 and above</li> <li>- External Handle</li> <li>- Extension Shaft</li> </ul>		<ul style="list-style-type: none"> <li>- Suitable for Top or Bottom Assembly (Price is for 1 number of extension box)</li> </ul>		
Frame	Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
B3	125A	3P	26K13012A	7360	26K23012A	8004	26E13012A	19124	26E10002A	2604
	160A		26K13016A	9312	26K23016A	9962	26E13016A	18310		
	200A CD		26K13019A	9678	26K23019A	10320	26E13019A	18392		
B4	200A		26K13020A	10586	26K23020A	11216	26E13020A	21922	26E10003A	4022
	250A		26K13025A	13750	26K23025A	14398	26E13025A	22950		
	315A CD		26K13030A	13862	26K23030A	14498	26E13030A	24192		
	400A CD		26K13039A	17228	26K23039A	17878	26E13039A	25576		
B5	315A		26K13031A	-	-	-	-	-	26E10004A	5118
	400A		26K13040A	24034	26K23040A	25244	26E13040A	44632		
	500A		26K13050A	26054	26K23050A	27058	26E13050A	48826		
	630A		26K13063A	26452	26K23063A	27980	26E13063A	50678		
	800A CD#	26K13079A	32132	26K23079A	33312	-	-	-		
B6	1000A	26K13100A	62400	26K23100A	62974	26E13100A	94584	26E10006A	15070	
	1250A CD	26K13124A	71220	26K23124A	76366	-	-	-	-	
B7	1250A	26K13125A	77218	26K23125A	81068	26E13125A	115564	26E10007A	19092	
	1600A	26K13160A	108986	26K23160A	110348	26E13160A	144434			
	1800A	26K13180A	114976	26K23180A	116934					
B8	2000A	26K13200A	146802	26K23200A	177038			-	-	
	2500A	26K13250A	186624	26K23250A	188362	-	-			
	3200A	26K13320A	239418	26K23320A	252730					

CD - Compact design

1) Please refer technical literature for exact technical characteristics

# Rating 800A is also available in B6 Frame

# OFFICE WHATSAPP NUMBER : 9223310978

### SIRCO - 4 Pole

HSN Code: 85365010

Conforms to IS/IEC 60947-3 up to AC23A<sup>1</sup>, Front operated, 415 V, 50 Hz

Solution			OPEN EXECUTION				ENCLOSED SOLUTION			
			KIT Type 1		KIT Type 2		Enclosed Switch		Extension Box	
Standard Configuration Includes										
			<ul style="list-style-type: none"> <li>- Switch</li> <li>- Interphase barriers from frame B3 and above</li> <li>- Direct Handle</li> </ul>		<ul style="list-style-type: none"> <li>- Switch</li> <li>- Interphase barriers from frame B3 and above</li> <li>- External Handle</li> <li>- Extension Shaft 200mm</li> </ul>		<ul style="list-style-type: none"> <li>- Enclosure Switch</li> <li>- Interphase barriers from frame B3 and above</li> <li>- External Handle</li> <li>- Extension Shaft</li> </ul>		<ul style="list-style-type: none"> <li>- Suitable for Top or Bottom Assembly (Price is for 1 number of extension box)</li> </ul>	
Frame	Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
B2*	63A	4P	26K14006A	4178	26K24006A	4772	26E14006A	8826	26E10001A	1528
	100A		26K14010A	7162	26K24010A	7756	26E14010A	10226		
	125A CD <sup>#</sup>		26K14011A	7836	26K24011A	8430	26E14011A	11426		
B3	160A		26K14016A	10952	26K24016A	11712	26E14016A	17250	26E10002A	2604
	200A CD		26K14019A	11384	26K24019A	12136	26E14019A	17868		
B4	200A		26K14020A	12446	26K24020A	13206	26E14020A	23450	26E10003A	4022
	250A		26K14025A	16178	26K24025A	16938	26E14025A	23486		
	315A CD		26K14030A	16308	26K24030A	17056	26E14030A	25726		
B5	400A CD		26K14039A	20270	26K24039A	21548	26E14039A	30396	26E10004A	5118
	315A		26K14031A	21302	26K24031A	24566	26E14031A	35764		
	400A	26K14040A	26014	26K24040A	26832	26E14040A	35714			
	500A	26K14050A	29804	26K24050A	31566	26E14050A	54258			
B6	630A	26K14063A	29952	26K24063A	31636	26E14063A	42636	-	-	
	800A CD <sup>#</sup>	26K14079A	37804	26K24079A	39184	-	-			
B7	1000A	26K14100A	73410	26K24100A	74094	26E14100A	107982	26E10006A	15070	
	1250A CD	26K14124A	83780	26K24124A	84374	-	-			
B8	1250A	26K14125A	90838	26K24125A	95374	26E14125A	134262	26E10007A	19092	
	1600A	26K14160A	128220	26K24160A	129078	26E14160A	166414			
	1800A	26K14180A	135262	26K24180A	142020	-	-			
B8	2000A	26K14200A	175704	26K24200A	213392	-	-	-	-	
	2500A	26K14250A	210002	26K24250A	220852	-	-			
	3200A	26K14320A	281670	26K24320A	295584	-	-			

CD - Compact design

1) Please refer technical literature for exact technical characteristics | \* Phase Barrier & Shaft is not available in frame B2

# Rating 125A & 800A are also available in B3 and B6 Frame respectively

## OFFICE WHATSAPP NUMBER : 9223310978

# SIRCO Accessories

Load Break and Isolation Switches

From 63A to 5000A

## SIRCO Accessories - 3 Pole & 4 Pole

HSN Code: 85381090



Frame	Direct Handle	LP (₹)	External Handle	LP (₹)	Shaft 200mm	LP (₹)	Shaft 250mm	LP (₹)	Shaft 320mm	LP (₹)
B2	42990001A	600	-	-	-	-	-	-	-	-
B3	26995042A	600	14212111A	1916	14001020A	666	14001025A	876	14001032A	1090
B4	26995052A	1082	14212111A	1916	14001020A	666	14001025A	876	14001032A	1090
B5	26995052A	1082	14212111A	1916	14001020A	666	14001025A	876	14001032A	1090
B6*	27997012A	4326	14433111A	2980	14011520A	1630	-	-	14011532A	2600
B7*	27997012A	4326	14433111A	2980	14011520A	1630	-	-	14011532A	2600
B8*	27997012A	4326	14538111A	31458	27993015A	8392	-	-	27993018A	8812

\* Handle for frames B6 to B8 are double arms handle



Frame	Interphase barrier - 3P	LP (₹)	Interphase barrier - 4P	LP (₹)
B2	-	-	-	-
B3	29985033A	278	29985034A	396
B4	29985023A	328	29985024A	482
B5	29985013A	390	29985014A	578
B6	-	-	-	-
B7	-	-	-	-

Frame	1st Aux Contact (1 NO/NC)	LP (₹)	2nd Aux Contact (1 NO/NC)	LP (₹)
B2	26091020A	340	26092020A	584
B3	26990031A	666	26990032A	784
B4	26990031A	666	26990032A	784
B5	26990031A	666	26990032A	784
B6*	26990031A	666	26990032A	784
B7*	26990031A	666	26990032A	784
B8*	26990031A	666	26990032A	784



Frame	Terminal Shroud - 3P	LP (₹)	Terminal Shroud - 4P	LP (₹)	Terminal Screen Standard - 3P	LP (₹)	Terminal Screen Standard - 4P	LP (₹)
B2	-	-	29944008A	482	-	-	-	-
B3	26943014A	1014	26944014A	1180	26983012A	1260	26984012A	1316
B4	26943021A	1132	26944021A	1346	26983020A	1260	26984020A	1316
B5	26943051A	1804	26944051A	2026	26983050A	1330	26984050A	1822
B6	-	-	-	-	26983080A	2196	26984080A	2906
B7	-	-	-	-	26983120A	3230	26984120A	3664
B8	-	-	-	-	26983200A	5548	26984200A	6284



Frame	Terminal Screen Wide - Top - 3P	LP (₹)	Terminal Screen Wide - Bottom - 3P	LP (₹)	Terminal Screen wide Top/Bottom - 4P	LP (₹)
B3	26983013A	964	26988013A	964	26984013A	1088
B4	26983021A	964	26988021A	964	26984021A	1088
B5	26983051A	1236	26988051A	1236	26984051A	1396

# SIRCO PV IEC 60947-3

## Load Break Switches for Photovoltaic Applications

from 100A to 3200A, up to 1500 VDC



SIRCO PV 2, 3, 4 Pole

### Functions

SIRCO PV are manually operated load break switches, making and breaking capacity under load conditions up to 1500 VDC.

These extremely durable switches have been tested and approved for use in the most demanding applications. They have been designed and tested for all types of applications: grounded, floating or bipolar.

### General characteristics

- Patented switching technology up to 500 VDC/pole.
- Positive indication.
- Up to 1500 VDC according to IEC 60947-3.

[vrajlink07@gmail.com](mailto:vrajlink07@gmail.com)

### Advantages

#### Optimise your investment

- Thanks to a reduced number of bridging bars, you can limit your costs and save mounting time.

#### High quality materials

SIRCO PV is an extremely robust device in a glass fibre reinforced polyester frame. This material provides:

- high mechanical strength,
- stability to temperature variations (RTI of 130°C),
- high dielectric strength (high CTI/tested as per standard ASTM D 2303).

#### Take advantage of an innovative design

The SIRCO PV can be directly connected up to four independent PV panel strings. The global solution cost is therefore reduced in comparison with the use of four distinct switches.

#### Reliability and performance

Our range of SIRCO PV load break switches is compliant to standards UL98B and IEC 60947-3. SIRCO PV have been tested to critical currents and at a 10 kA short-circuit during 50 ms without specific protection.

### SIRCO PV - 2 Pole, 3 Pole & 4 Pole

HSN Code (2P, 4P): 85365010 | HSN Code (3P): 85353090

Kit Type 1 with Direct Handle							Kit Type 2 with External Handle					
2 Pole 1000 V dc			3 Pole 1500 V dc		4 Pole 1000 V dc		2 Pole 1000 V dc		3 Pole 1500 V dc		4 Pole 1000 V dc	
Rating	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
100A	26P12010	On Request	-	-	-	-	26P22010	On Request	-	-	-	-
160A	26P12016	On Request	26P13015A	On Request	-	-	26P22016	On Request	26P23015A	On Request	-	-
250A	26P12025	On Request	26P13024A	On Request	26P14025	On Request	26P22025	On Request	26P23024A	On Request	26P24025	On Request
315A	26P12031	On Request	26P13030A	On Request	26P14031	On Request	26P22031	On Request	26P23030A	On Request	26P24031	On Request
400A	26P12039	On Request	26P13039A	On Request	26P14040	On Request	26P22039	On Request	26P23039A	On Request	26P24040	On Request
500 A	-	-	26P13049A	On Request	26P14050	On Request	-	-	26P23049A	On Request	26P24050	On Request
630A	-	-	-	-	26P14063	On Request	-	-	-	-	26P24063	On Request
800 A	-	-	-	-	26P14080	On Request	-	-	-	-	26P24080	On Request

For enquiries >800 A, please contact our regional sales representatives.

# Safety Enclosure

## Local Visible Cut-off Switches for the Heavy Industries

From 50A to 630A



Safety Enclosures

### Functions

A visible cut-off switch shall be installed on the power cable to each motor for:

- Locking out the motor for maintenance (safety isolation).
- Controlling the motor locally for maintenance purposes.
- Emergency stop and emergency shut-down (on load break).

SOCOMEK visible cut-off switch ensures a safe and fast maintenance as it prevents from entering the electrical substations to cut-off the power. In order to reduce the level of hazard during motor lock-out, the safety switch must be installed as closed as possible from the motor.

**Locking out operation can be carried by a non-electrical person.**

### Advantages

#### Easy to Install

Secure connections and commissioning due to a well equipped enclosure.

#### Built for Lasting

Equipped with high standard material SOCOMEK safety enclosure can resist in harsh environment.

#### Designed for Safety

Thanks to the dedicated cut-off equipment, the user can operate the equipment quickly and safely.

### Safety Enclosure, IP55 design, for Copper Cable

HSN Code: 85365010

Rating	Reference <sup>(1)</sup>	LP (₹)	Reference <sup>(2)</sup>	LP (₹)	Reference <sup>(3)</sup>	LP (₹)	Reference <sup>(4)</sup>	LP (₹)
50 A	32AS3005	On Request	32AS3105	On Request	32AS3205	On Request	32AS3305	On Request
80 A	32AS3008	On Request	32AS3108	On Request	32AS3208	On Request	32AS3308	On Request
125 A	32AS3012	On Request	32AS3112	On Request	32AS3212	On Request	32AS3312	On Request
200 A	32AS3020	On Request	32AS3120	On Request	32AS3220	On Request	32AS3320	On Request
400 A	32AS3040	On Request	32AS3140	On Request	32AS3240	On Request	32AS3340	On Request
630 A	32AS3063	On Request	32AS3163	On Request	32AS3263	On Request	32AS3363	On Request

### Safety Enclosure, IP65 design, for Aluminium Cable

HSN Code: 85365010

Rating	Reference <sup>(1)</sup>	LP (₹)	Reference <sup>(2)</sup>	LP (₹)	Reference <sup>(3)</sup>	LP (₹)	Reference <sup>(4)</sup>	LP (₹)
50 A	34AA3005-HC	On Request	34AA3105-HC	On Request	34AA3205-HC	On Request	34AA3305-HC	On Request
80 A	34AA3008-HC	On Request	34AA3108-HC	On Request	34AA3208-HC	On Request	34AA3308-HC	On Request
125 A	34AA3012-HC	On Request	34AA3112-HC	On Request	34AA3212-HC	On Request	34AA3312-HC	On Request
200 A	34AA3020-HC	On Request	34AA3120-HC	On Request	34AA3220-HC	On Request	34AA3320-HC	On Request
400 A	34AA3040-HC	On Request	34AA3140-HC	On Request	34AA3240-HC	On Request	34AA3340-HC	On Request
630 A	34AA3063-HC	On Request	34AA3163-HC	On Request	34AA3263-HC	On Request	34AA3363-HC	On Request

(1) Package: 0 push button; 0 auxiliary contacts.

(2) 1 way: 1 ON and 1 OFF push buttons; 2 NO/NC pre-cut off auxiliary contacts.

(3) 2 way: 2 ON and 1 OFF push buttons; 2 NO/NC pre-cut off auxiliary contacts.

(4) VSD: Variable Speed Drive, 1 ON, 1 OFF and 2 +/- speed push buttons; 2 NO/NC pre-cut off auxiliary contacts.



When **energy** matters

## A complete solution for switching and protection line dedicated for ESS applications



**FP ESS**  
Ranging from 160 to 3000A



**SIRCO DC / SIRCO DC ESS**  
from 2000 to 3600 A,  
up to 1500 VDC

- Innovative design
- Robust made with high quality materials
- Reliability and Premium performance for energy storage
- Fully tested and certified

# SIRCO DC / SIRCO DC ESS

Load Break Switches for Direct Current Applications  
from 2000 to 3600 A, up to 1500 VDC



## Functions

SIRCO DC and SIRCO DC ESS units are manual control multipolar load break switches.

They provide make and break on-load and safety disconnection for all low voltage electrical circuits for direct current applications up to 1500 VDC.

## General characteristics

- Up to 1500 VDC, 2000 to 3600 A.
- Patented switching technology up to 1500 VDC on 2 poles.
- High short-circuit option available.

## Advantages

### High-performance switching

SIRCO DC and SIRCO DC ESS load break switches include a patented technology providing 1500 VDC breaking capacity with only 2 poles, with significant power loss reduction. This range covers nominal values from 2000 to 3600 A, 1500 VDC.

### Design tested in application

Designed and tested for numerous direct current applications, with tried-and-tested performance in the most difficult environments.

The arc quenching system provides safe disconnection, arc quenching and quick current interruption.

- Tested against high short-circuit systems with and without fuse protection to provide complete protection for the system above 210 kA.
- Tried-and-tested against severe environmental factors, in particular: "Annex Q level C according to IEC" tested in salt mist, at high temperature and altitude, tested in humidity cycle. (ASTM D 2303).

### Reduced total cost of ownership

Developed with a view to reducing costs for the user, the product has improvements that ensure the lowest total cost of ownership.

- Flexible connection configurations enable simple input and output connection, with savings made by not using bridging bars in series.
- The multi-circuit design enables configuration of one 3600 A circuit or two 1600 A circuits for greater flexibility.
- A single design for IEC and UL products provides the same base design for customers with IEC or UL machines.
- A compact solution with reduced footprint and weight improves the durability, while reducing packaging, transport and installation costs.

**For more details about SIRCO PV and INOSYS for DC applications, please contact our sales representatives.**

# FP ESS

Fuses for Energy Storage Systems  
from 160 to 3000 A, up to 1500 VDC



## Function

FP ESS fuses are designed specifically for DC networks with high voltage and short circuit levels. They perfectly meet the requirements of energy storage applications and ensure optimal protection of battery racks and battery connection panel (BCP) against short circuits and overloads.

## General characteristics

- Premium performance for Energy Storage
- A range for a multitude of designs
- Certified coordination

## Advantages

### Premium performance for energy storage

FP ESS fuses have been specially developed to meet the requirements of Energy Storage applications:

- They are sized for installations with potential short-circuit currents of up to 250 kA and continuous voltages of up to 1500 VDC,
- These fuses offer increased reliability, ensuring consistent performance over time. their silver-based composition protects them from premature ageing, making them perfectly suited to the cyclic operations characteristic of energy storage application.

### A range for a multitude of designs

The FP ESS fuse range covers requirements from 160 to 3000 A, several mounting types and complies with UL, CSA and IEC standards. Combined with the advice of our experts, manufacturers are guaranteed to find the most suitable technical solution by limiting the energy transmitted to the Energy Storage system as much as possible in the event of a fault.

### Certified coordination

Combining load break switches with FP ESS fuses enables us to surpass industry standards for protection and safety. Socomec conducts rigorous real-world testing on this combination to push the boundaries of performance and safety even further.

## FP ESS - Frame 2

Rating	Reference			Standard Package Quantity	LP (₹)
	DIN	Bolted	Flush		
160A	61S12016	61S22016	61S32016	8	On Request
200A	61S12020	61S22020	61S32020	8	
250A	61S12025	61S22025	61S32025	8	
280A	61S12028	61S22028	61S32028	8	
315A	61S12032	61S22032	61S32032	8	
350A	61S12035	61S22035	61S22035	8	
400A	61S12040	61S22040	61S32040	8	
450A	61S12045	61S22045	61S32045	8	
500A	61S13050	61S23050	61S33050	8	
550A	61S13055	61S23055	61S33055	8	
630A	61S12063	61S22063	61S32063	8	
700A	61S12070	61S22070	61S32070	8	
800A	61S12080	61S22080	61S32080	8	

### FP ESS - Frame 3

Rating	Reference			Standard Package Quantity	LP (₹)
	DIN	Bolted	Flush		
315A	61S13032	61S23032	61S32032	6	On Request
350A	61S13035	61S23035	61S32035	6	
400A	61S13040	61S23040	61S32040	6	
450A	61S13045	61S23045	61S32045	6	
500A	61S13050	61S23050	61S33050	6	
550A	61S13055	61S23055	61S33055	6	
630A	61S13063	61S23063	61S32063	6	
700A	61S13070	61S23070	61S33070	6	
800A	61S13080	61S23080	61S32080	6	
900A	61S13090	61S23090	61S33090	6	
1000A	61S13100	61S23100	61S32063	6	
1100A	61S13110	61S23110	61S33110	6	
1200A	61S13120	61S23120	61S32080	6	

### FP ESS - Flush Type - Frame 4

Rating	Reference	Standard Package Quantity	LP (₹)
630A	61S34063	2	On Request
700A	61S34070	2	
800A	61S34080	2	
900A	61S34090	2	
1000A	61S34100	2	
1100A	61S34110	2	
1250A	61S34125	2	
1500A	61S34150	2	
1600A	61S34160	2	
1800A	61S34180	2	

### FP ESS - Flush Type - Frame 5

Rating	Reference	Standard Package Quantity	LP (₹)
1250A	61S3 5125	1	On Request
1350A	61S3 5135	1	
1500A	61S3 5150	1	
1800A	61S3 5180	1	
2000A	61S3 5200	1	
2200A	61S3 5220	1	
2500A	61S3 5250	1	
2800A	61S3 5280	1	
3000A	61S3 5300	1	

# It's time to Change Over



Switch to world leading  
Changeover, switch to **SIRCOVER**

High-performance  
switching

IEC  
60947-6-1  
compliant



Ultimate safety

Reliable and robust

## Are you looking for safe and reliable electrical installation?

Discover SIRCOVER, the new generation of Changeover. Designed for demanding applications, compliant with IEC 60947-6-1 and IEC/IS 60947-3, they provide ultimate safety and optimum performance.

### **SIRCOVER**

Manually operated transfer switching equipment:  
- from 63 to 3200 A, 3 or 4 poles, bare switch or enclosed  
- I-O-II, I-I+II-II or bypass

# SIRCOVER

## Manual Transfer Switching Equipment

From 63A to 3200A

**vrajlink.com**



SIRCOVER



Enclosed Switch



SIRCOVER Bypass



Extension Box

### Function

SIRCOVER products are manually operated transfer switches with positive break indication. There are 2 ranges in the series:

- SIRCOVER for open transition switching (I-O-II) available in 4 poles. For applications where both sources are synchronised and there is to be no interruption to the load supply during transfer.
- SIRCOVER Bypass: This combination of three interlocked load break switches provides 3+6 or 4+8 poles for bypass applications.

They provide on-load transfer between two sources for any low voltage power circuit, as well as safety isolation by double breaking per pole. Other applications include source inversion (e.g. to change the direction of a motor) or grounding/earthing.

### Advantages

#### High electrical performance

SIRCOVER is capable of switching all types of loads, without the need for a pre-breaking switch at the upstream. It is also compatible with motor and mixed loads up to utilisation category AC-33 at 415 VAC.

#### Easy to connect

Wider spearhead terminals for better clearance (up to B5 frame) enables easy termination of Aluminium cables / Busbars.

#### Safety of operations

SIRCOVER devices have three stable positions, unaffected by voltage fluctuations and vibrations, protecting your loads from network disturbances.

**vrajlink07@gmail.com**

#### On-load and isolation switching

With its AC-23 and AC-33 characteristics, tested according to standards IEC 60947-3 and IEC 60947-6-1. The SIRCOVER enables safe on-load switching for any type of load. With its on-load transfer capabilities, it is not necessary to isolate loads prior to transfer. Therefore the SIRCOVER offers an economical solution.

#### High level of safety

SIRCOVER is based on a reliable switching mechanism that is fully independent on the user operating speed that includes a fail-safe mechanical interlock for all 3 positions (for I-O-II versions). Moreover they provide I-O-II position indicators directly on the handle and mechanism.

॥ श्री गणेशाय नमः ॥      ॥ जे जे श्री गोकुलेश ॥

**Dipenbhai Kadakia**                      **Chiragbhai Kadakia**  
MOBILE : +91-9619800070                      MOBILE : +91-9833935831

**VRAJ LINK**

1st Choice for Changeover & Automatic transfer switch (Alys) Specialist

-: AUTHORISED DISTRIBUTORS :-

**ASCO** Power Technologies

By

**Schneider Electric**

**HPL**

**elmex**

since 1963

**socomec** VERITEK

Innovative Power Solutions

**Pyok dv's**

... a mark of quality

**Finolex** Cables Limited

**AXON** Electric

since 1963

**ELMEASURE**

Possibilities... Infinite

**Be Switchgear India**

THE REAL SWITCHGEAR

Admin. Off.: Shop No. 17, Gr. Flr., Opp. Electric Crematorium, 66/74 Chandanwadi, Marine Lines (e), Mumbai - 400 002. Tel.: +91 9223310978 E-mail : vrajlink09@gmail.com Website : www.vrajlink.com

# SIRCOVER

Manual Transfer Switching Equipment


From 63A to 3200A

vrajlink07@gmail.com

## SIRCOVER - 3 Pole

HSN Code: 85365010

Conforms to IEC 60947-6-1 up to AC33B<sup>1</sup>, IS/IEC 60947-3 up to AC-23A<sup>1</sup>, Front operated 415 V, 50 Hz.

Solution			OPEN EXECUTION				ENCLOSED SOLUTION			
			KIT Type 1		KIT Type 2		Enclosed Switch		Extension Box	
Standard Configuration Includes										
			<ul style="list-style-type: none"> <li>- Transfer switch</li> <li>- Direct handle</li> <li>- Bridging Bars up to 1600 A</li> <li>- Interphase barriers from frame B3 and above</li> </ul>		<ul style="list-style-type: none"> <li>- Transfer switch</li> <li>- Bridging Bars up to 1600 A</li> <li>- Extended handle</li> <li>- 200 mm shaft</li> <li>- Interphase barriers from frame B3 and above</li> </ul>		<ul style="list-style-type: none"> <li>- Transfer switch</li> <li>- Extended handle</li> <li>- Bridging Bars up to 1600 A</li> <li>- Extension shaft</li> <li>- Interphase barriers from frame B3 and above</li> </ul>		<ul style="list-style-type: none"> <li>- Suitable for Top or Bottom Assembly (Price is for 1 number of extension box)</li> </ul>	
Frame	Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
B3	125A	3P	41K13013A	18710	41K23013A	19764	41E13013A	30434	41E10002A	4164
	160A		41K13016A	18900	41K23016A	19960	41E13016A	31160		
	200A		41K13020A	20322	41K23020A	21636	41E13020A	31892		
B4	250A		41K13025A	26166	41K23025A	27554	41E13025A	33990	41E10003A	4450
	315A		41K13031A	27656	41K23031A	29090	41E13031A	36170		
	400A		41K13040A	40676	41K23040A	42490	41E13040A	51944		
B5	500A		41K13050A	60438	41K23050A	62102	41E13050A	84072	41E10005A	7364
	630A		41K13063A	58510	41K23063A	63002	41E13063A	85408		
	CD800A <sup>#</sup>		41K13079A	62064	41K23079A	67388	-	-		
B6	1000A		41K13100A	151164	41K23100A	155492	41E13100A	172986	41E10006A	15604
	1250A	41K13120A	168678	41K23120A	171652	41E13120A	220336			
B7	1600A	41K13160A	205092	41K23160A	221740	41E13160A	298770	41E10007A	49124	
B8	2000A	41K13200A	288342	41K23200A	312212	41E13200A	385390	41E10008A	63232	
	2500A	41K13250A	384740	41K23250A	397794	41E13250A	512626			
	3200A	41K13320A	527026	41K23320A	544142	41E13320A	670796			

CD - Compact Design

1) Please refer technical literature for exact technical characteristics

# Rating 800A is also available in B6 Frame

### SIRCOVER - 4 Pole

HSN Code: 85365010

Conforms to IEC 60947-6-1 up to AC33B<sup>1</sup>, IS/IEC 60947-3 up to AC-23A<sup>1</sup>, Front operated 415 V, 50 Hz.

Solution			OPEN EXECUTION				ENCLOSED SOLUTION			
			KIT Type 1		KIT Type 2		Enclosed Switch		Extension Box	
Standard Configuration Includes										
			<ul style="list-style-type: none"> <li>- Transfer switch</li> <li>- Direct handle</li> <li>- Bridging Bars up to 1600 A</li> <li>- Interphase barriers from frame B3 and above</li> </ul>		<ul style="list-style-type: none"> <li>- Transfer switch</li> <li>- Bridging Bars up to 1600 A</li> <li>- Extended handle</li> <li>- 200 mm shaft</li> <li>- Interphase barriers from frame B3 and above</li> </ul>		<ul style="list-style-type: none"> <li>- Transfer switch</li> <li>- Extended handle</li> <li>- Bridging Bars up to 1600 A</li> <li>- Extension shaft</li> <li>- Interphase barriers from frame B3 and above</li> </ul>		<ul style="list-style-type: none"> <li>- Suitable for Top or Bottom Assembly (Price is for 1 number of extension box)</li> </ul>	
Frame	Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
B2*	63A	4P	41K14006A	7322	41K24006A	7696	41E14006A	13934	41E10001A	2836
	100A		41K14010A	9844	41K24010A	10142	41E14010A	14800		
	CD125A		41K14011A	12696	41K24011A	13280	41E14011A	18420		
B3	125A		41G14013A	16374	41G24013A	16848	41E14013A	27704	41E10002A	4164
	160A		41G14016A	17812	41G24016A	18210	41E14016A	28490		
	200A		41G14020A	21642	41G24020A	22186	41E14020A	28848		
B4	250A		41G14025A	28798	41G24025A	29482	41E14025A	39412	41E10003A	4450
	315A		41G14031A	30730	41G24031A	30820	41E14031A	42718		
	400A		41G14040A	45214	41G24040A	45462	41E14040A	59224		
B5	630A		41G14063A	58772	41G24063A	58962	41E14063A	78460	41E10005A	7364
	CD800A#	41G14079A	73510	41G24079A	75228	-	-	-	-	
B6	1000A	41K14100A	184510	41K24100A	188860	41E14100A	225656	41E10006A	15604	
	1250A	41K14120A	207624	41K24120A	210436	41E14120A	254012			
B7	1600A	41K14160A	273440	41K24160A	278948	41E14160A	332888	41E10007A	49124	
B8	2000A	41K14200A	382762	41K24200A	418824	41E14200A	486730	41E10008A	63232	
	2500A	41K14250A	442580	41K24250A	445002	41E14250A	583844			
	3200A	41K14320A	579902	41K24320A	608734	41E14320A	768220			

CD - Compact Design

1) Please refer technical literature for exact technical characteristics

\* Phase Barrier & Shaft is not available in B2

# Rating 800A is also available in B6 Frame

## OFFICE WHATSAPP NUMBER : 9223310978

# SIRCOVER

Manual Transfer Switching Equipment

From 63A to 3200A

## vrajlink07@gmail.com

### SIRCOVER Accessories - 3 Pole & 4 Pole

HSN Code: 85381090



Frame	Direct Handle	LP (₹)	External Handle	LP (₹)	Shaft 200mm	LP (₹)	Shaft 320mm	LP (₹)
B2	42990002A	716	-	-	-	-	-	-
B3	41995012A	1440	14212113A	2194	14001020A	666	14001032A	1090
B4	41995012A	1440	14212113A	2194	14001020A	666	14001032A	1090
B5	41995012A	1440	14212113A	2194	14001020A	666	14001032A	1090
B6*	27997052A	3734	14433113A	5272	14011520A	1630	14011532A	2600
B7*	27997052A	3734	14433113A	5272	14011520A	1630	14011532A	2600
B8*	27997012A	4326	14538113A	31258	27993015A	8392	27993018	8812

\* double arms handle



Frame	Interphase barrier 3P	LP (₹)	Interphase barrier 4P	LP (₹)	1st or 2nd Aux Contact (1NO/NC)	LP (₹)	Interlock Kit*	LP (₹)
B2	-	-	-	-	42091030A	810	42590002A	976
B3	29985036A	532	29985039A	750	41090021A	846	42590003A	994
B4	29985026A	636	29985029A	892	41090021A	846	42590003A	994
B5	29985016A	762	29985019A	1332	41090021A	846	42590003A	994
B6	-	-	-	-	41090021A	846	-	-
B7	-	-	-	-	41090021A	846	-	-
B8	-	-	-	-	41090021A	846	-	-

\* for external operation of Kit 1, interlock kit can be used

\* for using Interlock kit in K2, direct handle to be ordered extra

Old changeover switch (COS)		Retrofit Solutions		
Rating	Reference	Switch Reference	Kit Reference	LP (₹)
125A	GC01 254POI	GC01 254POI	41RT 4020A	4356
160A	GC01 604POI	GC01 604POI	41RT 4020A	4356
200A	GC02 004POI	GC02 004POI	41RT 4020A	4356
250A	GC02 504POI	GC02 504POI	41RT 4031A	6148
315A	GC03 204POI	GC03 204POI	41RT 4031A	6148
630A	GC06 304POI	GC06 304POI	41RT 4063A	9140

\* for 400 A, please consult us.

\* above list price is only for retrofit kit, for switch prices please refer page no. 22

\* To replace Socomec old changeover (COS), use retrofit kit along with the NEW SIRCOVER with direct handle option

#### SIRCOVER BYPASS - 4 Pole

HSN Code: 85365010

Conforms to IS/IEC 60947-3 AC-23A<sup>1</sup>, front operated 415 V, 50 Hz.

Solution		OPEN EXECUTION	
Standard Configuration Includes		SIRCOVER BYPASS	
			
		<ul style="list-style-type: none"> <li>- Switch</li> <li>- Interphase barrier</li> <li>- External Handle</li> <li>- Bridging Bars</li> <li>- Shaft 200mm</li> </ul>	
Rating	Poles	Reference	LP (₹)
125A	4P	41K29013A	32374
160A		41K29016A	32546
200A		41K29020A	33424
250A		41K29025A	46412
400A		41K29040A	67986
500A		41K29050A	111956
630A		41K29063A	112896
800A		41K29080A	338080
1000A		41K29100A	382786
1250A		41K29120A	383888
1600A	41K29160A	490628	

1) Please refer technical literature for exact characteristics

#### SIRCOVER BYPASS Accessories - 4 Pole

HSN Code: 85381090

Conforms to IS/IEC 60947-3 AC-23A<sup>1</sup>, front operated 415 V, 50 Hz.



Rating	External Handle	LP (₹)	Shaft 200mm	LP (₹)	Shaft 320mm	LP (₹)	1st Aux Contact (1NO/NC)	LP (₹)
125A	14212113A	2194	14001020A	666	14001032A	1090	41090021A	846
160A	14212113A	2194	14001020A	666	14001032A	1090	41090021A	846
200A	14212113A	2194	14001020A	666	14001032A	1090	41090021A	846
250A	14333113A	4216	14011520A	1630	14011532A	2600	41090021A	846
400A	14333113A	4216	14011520A	1630	14011532A	2600	41090021A	846
500A	14333113A	4216	14011520A	1630	14011532A	2600	41090021A	846
630A	14333113A	4216	14011520A	1630	14011532A	2600	41090021A	846
1250A	41997146A	26096	27993015A	8392	27993018	8812	41090021A	846
1600A	41997146A	26096	27993015A	8392	27993018	8812	41090021A	846

# When **energy** matters



**ATyS is remotely operated or fully automatic transfer switching equipment (TSE) assures the continuity of power to a load in a safe and reliable way.**

- **Wider range of ATyS** products for different applications. With or without dual power supply, ATS controller, Communication, Software and more.
- **Tested in full compliance** with IEC 60947-6-1 & IEC 60947-3.
- **Unique lateral movement design** with self cleaning contacts ensure high performance and power availability.
- **Wide band control voltage** 166 - 332 V for motor.
- **Self diagnostic watchdog relay** for the motor and controller.
- **3-positions (I-0-II) pad lockable** with 100% manual on-load transfer feasibility with operating handle.

**ATyS:** a complete range of transfer switching equipment for every application from 25A to 6300A

# ATyS a M

# VRAJ LINK

## Preset Automatic Transfer Switching Equipment

From 25A to 160A



ATyS a M

### Function

ATyS a M supports the automatic transfer between two power supply sources - and safe isolation - for any low voltage installation. The product includes an integrated pre-set controller which automatically transfers the power supply between the normal source (main transformer) and the emergency source (generating set or main transformer). They are intended for on-load operations, where a brief interruption of the load supply is acceptable during transition between sources (I-O-II).

### General characteristics

- Range from 25 to 160 A.
- Available in 4P.
- AC-33B utilisation category.4
- Automatic or manual operations.
- Padlocking facility.
- Optional Modbus communication.

### Advantages

#### Quick & easy commissioning

With an integrated and preset controller, configuration time is reduced to zero and the potential for human error is eliminated – making the commissioning process straightforward.

ATyS a M timers and thresholds are defined for the most relevant Main/Main and Main/GenSet applications, which means that source transfer is managed automatically.

#### Space saving

ATyS a M offers unrivalled flexibility for a seamless integration process, even in the most constrained enclosures and panels. Thanks to its modular design, mounting and cabling spaces are optimised to allow the use of more compact panels – which in turn reduces the total cost of ownership.

### Proven reliability

ATyS a M has been designed and tested according to IEC 60947-6-1 and GB/T 14048.11, achieving performance of PC class – the most robust and reliable class, intended to preserve the transfer function for increased reliability and an improved return on investment. The AC-33B utilisation category confirms that the system is suitable for any type of load, including inductive loads such as motors.

[vrajlink.com](http://vrajlink.com)

[vrajlink07@gmail.com](mailto:vrajlink07@gmail.com)

### ATyS a M - 4 Pole

HSN Code: 85365010

Rating	Poles	Reference	LP (₹)
25A	4P	93354002	On Request
32A		93354003	
40A		93354004	
63A		93354006	
80A		93354008	
100A		93354010	
125A		93354012	
160A		93354016	

**OFFICE WHATSAPP NUMBER : 9223310978**

# ATyS S - ATyS Sd

# VRAJ LINK

Remotely Operated Transfer Switching Equipment

From 40A to 125A

[vrajlink07@gmail.com](mailto:vrajlink07@gmail.com)



ATyS S - ATyS Sd

### Function

ATyS S products are 4 pole remotely operated transfer switches with positive break indication. They enable the on-load transfer of two three-phase supplies via remote volt-free contacts, from either an external automatic controller, using pulse logic, or a switch.

They are intended for use in low voltage power supply systems where a brief interruption of the load supply is acceptable during transfer.

### Advantages

#### Extensive power supply range

The ATyS S is available in four supply versions, each with a broad range (+/-30%). The four versions are:

- 12 VDC power supply.
- 24/48 VDC power supply.
- 230 VAC single power supply.
- 2 x 230 VAC dual power supply.

#### Safety and reliability

ATyS S products use stable position technology, ensuring constant pressure on the contacts and preventing premature ageing. In addition, they do not require a power supply to maintain position, thus protecting their loads from voltage fluctuations.

#### Easy integration

ATyS S products can be easily installed inside enclosures. Their design, and in particular their compact size, enables integration within most 200 mm deep enclosures.

#### Simplified maintenance

Maintenance can be carried out easily under load, with manual operation still available. The control and motorisation section can be replaced simply by removing 4 screws, with no work required on the installation cabling.

#### ATyS Sd: Dual power supply

In addition to the functions offered by the ATyS S, the ATyS Sd incorporates supply redundancy without the need for additional wiring. This is obtained by integrating a double supply (2 independent supplies) directly within the product.

[vrajlink.com](http://vrajlink.com)

### ATyS S - ATyS Sd - 4 Pole

HSN Code: 85365010

Conforms to IEC 60947-6-1, IS/IEC 60947-3

Solution		Remotely Operated							
		ATyS S 230 Vac		ATyS Sd 230 Vac x 2		ATyS S 12Vdc		ATyS S 24/48Vdc	
Standard Configuration Includes		- Switch - Handle - Bridging Bars		- Switch - Handle - Bridging Bars - Dual Power Supply		- Switch - Handle - Bridging Bars		- Switch - Handle - Bridging Bars	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)	Reference	LP (₹)
40A	4P	95034004SL	35104	95134004SL	38870	95054004SL	35104	95064004SL	35104
63A		95034006SL	37066	95134006SL	40732	95054006SL	36704	95064006SL	36704
80A		95034008SL	39890	95134008SL	44282	95054008SL	39890	95064008SL	39890
100A		95034010SL	45110	95134010SL	49586	95054010SL	44670	95064010SL	44670
125A		95034012SL	48336	95134012SL	53134	95054012SL	47868	95064012SL	47868

**OFFICE WHATSAPP NUMBER : 9223310978**

# ATyS t M & ATyS g M

## Automatic Transfer Switching Equipment

From 40A to 160A



### Function

ATyS t Mand ATyS g Mare modular automatic transfer switches with positive break indication. ATyS t M are 4 pole (three-phase) devices and ATyS g M are 2 or 4 pole (single or three-phase) devices.

They have all the functions of the ATyS d M together with an integrated controller, giving them automatic features dedicated to mains/mains (ATyS t M) and mains/genset (ATyS g M) applications. They are intended for use in low voltage power supply systems where a brief interruption of the load supply is acceptable during transfer.

### Advantages

#### Quick start

ATyS t M and g M transfer switches offer significant time saving during commissioning (the process takes 2 to 3 minutes). Thanks to the design that allows commissioning through just one potentiometer (4 on the ATyS g M) and four DIP switches, a screwdriver is all that is required to configure the parameters.

#### ATyS g M: dedicated to mains/genset applications

In addition to its single-phase and three-phase voltage & frequency monitoring for both incoming sources, the product's integrated controller also features functions that are specific to mains/genset applications (genset control, test on load, etc.).

#### ATyS t M: dedicated to three-phase mains/mains applications

The ATyS t M integrated controller has been designed to provide all the functions necessary for these applications (operation with or without priority, preferred source selection) together with the monitoring of the voltage and frequency of both sources for three-phase networks.

#### Secure programming

To ensure that the correct configuration is maintained an optional sealable cover can be fitted in order to avoid any unintentional modifications to the programming.

### ATyS t M & ATyS g M - 4 pole

HSN Code: 85365010

Conforms to IEC 60947-6-1, IS/IEC 60947-3

Solution		Automatic Transfer Switch Equipment ( ATSE)			
		ATyS t M		ATyS g M	
Standard Configuration Includes		- Switch - Handle		- Switch - Handle	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)
40A	4P	93444004G	61900	93544004G	On Request
63A		93444006G	66012	93544006G	
80A		93444008G	69530	93544008G	
100A		93444010G	71294	93544010G	
125A		93444012G	78774	93544012G	
160A		93444016G	95944	93544016G	

\* Please consult us, for 2Pole ATyS M  
\* Bridging bars available as optional

# ATyS p M

## Automatic Transfer Switching Equipment

From 40A to 160A



ATyS p M  
I-0-II 4P

### Function

ATyS p M are single-phase or three-phase modular automatic transfer switches with positive break indication. Functions include ATyS t M and ATyS g M capability, with additional programmable parameters and a tripping function. A product model with communication is available.

They are intended for use in low voltage power supply systems where a brief interruption of the load supply is acceptable during transfer.

### Advantages

#### Flexible programming

ATyS p M time delays and inputs/outputs are completely configurable, hence enabling the easy monitoring of specific applications (load shedding, test...) and the definition of an operating cycle specifically adapted to your application.

#### Trip function

ATyS p M features a function for returning to the 0 position in case of the loss of both power supply sources (tripping). This protects the load from issues due to source instability.

#### Communication and configuration

A specific version of ATyS p M is available with integrated Modbus communication. This gives access to most product data (status, voltages, frequencies...). A user friendly configuration software is also available free (Easyconfig) to configure, view and save all the parameters in the ATyS p M.

#### Remote control interface

Specifically designed for installations where the product is enclosed, the remote interface displays product status on the front panel (D10) or displays and controls with access to programming (D20).

### ATyS p M - 4 Pole

HSN Code: 85365010

Conforms to IEC 60947-6-1, IS/IEC 60947-3

Solution		Automatic Transfer Switch Equipment ( ATSE )			
		ATyS p M		ATyS p M + COM	
Standard Configuration Includes		- Switch - Handle		- Switch - Handle - With RS 485	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)
40A	4P	93644004G	On Request	93844004G	On Request
63A		93644006G		93844006G	
80A		93644008G		93844008G	
100A		93644010G		93844010G	
125A		93644012G		93844012G	
160A		93644016G		93844016G	

# ATyS r

## Remotely Operated Transfer Switching Equipment

From 125A to 3200A

# VRAJ LINK



ATyS r

### Function

ATyS r are 3 or 4 pole remotely operated motorised transfer switches with positive break indication. They enable the on-load transfer of two three-phase power supplies via remote volt-free contacts, from either an external automatic controller, using pulse logic, or a switch.

They are intended for use in low voltage power systems where interruption of the load supply is acceptable during transfer.

[vrajlink.com](http://vrajlink.com)

### Advantages

#### Watchdog relay to check product availability

ATyS r products are equipped with a Watchdog relay which constantly monitors your product, thereby securing the installation. This relay informs in real time the user of the product's availability, i.e. whether it is operational and ready for source switching.

#### Integrated auxiliary contacts

As part of the product monitoring function, the ATyS r enable the transmission of information relating to their position. This is possible thanks to the standard integration of an auxiliary contact for each position.

#### Extended power supply range

ATyS r products offer greater availability thanks to their extensive power supply range of 208 to 277 VAC ± 20%.

#### Even more robust

The updated design includes metal mounting legs across the entire ATyS range, improving the overall robustness of the switches. It also allows an easier and trouble-free mounting of the switches on a back plate with preassembled screws.

[vrajlink07@gmail.com](mailto:vrajlink07@gmail.com)

### ATyS r - 4 Pole

HSN Code: 85365010

Conforms to IEC 60947-6-1, IEC 60947-3

Solution		Remotely Operated	
Standard Configuration Includes		ATyS r	
		<ul style="list-style-type: none"> <li>- Switch</li> <li>- Handle</li> <li>- Bridging Bars up to 1600A</li> </ul>	
Rating	Poles	Reference	LP (₹)
125A	4P	95234012SL	86236
160A		95234016SL	88446
200A		95234020SL	90556
250A		95234025SL	112976
315A		95234031SL	114720
400A		95234040SL	142746
500A		95234050SL	153254
630A		95234063SL	181280
800A		95234080SL	258526
1000A		95234100SL	312714
1250A		95234120SL	384414
1600A		95234160SL	477104
2000A		95234200G	696690
2500A		95234250G	770044
3200A		95234320G	989988

## A15 CONTROLLER

# ATyS d H

## Remotely Operated Transfer Switching Equipment

From 4000A to 6300A



ATyS d H

### Function

The ATyS d H is a three-phase transfer switch, 3 and 4 poles, designed for low voltage high power applications that require high-performance and fast reliable switching. The open transition transfer is performed on-load in line with IEC 60947-6-1 and GB/T 14048-11 standards (Class PC) with minimal power supply interruption to the load during transfer.

The ATyS d H is remote transfer switching equipment (RTSE) with an integrated dual power supply (DPS) that accepts remote orders through volt-free contacts.

### Advantages

#### Ready for installation in the enclosure of your choice

The ATyS d H has been designed to facilitate installation. It is composed of two switches that are mounted one above the other with easily accessible power connections located at the rear. Furthermore the ATyS d H does not need any external bridging bars as the load side is connected within the product. This enables to save time during installation.

#### Safe on-load transfer: I-0-II

The ATyS d H includes two mechanically interlocked switches to ensure fast switching whilst providing a neutral (Off - 0) position. This ensures that the main and alternative power supplies do not overlap.

#### High-performance switching

The ATyS d H offers high withstand short circuit current ratings of 143 kA Icm (making) and 65 kA for 0.1sec Icw (withstand). Further to its high short circuit withstand, the ATyS d H performance in terms of load switching capacity is AC-33iB (6 x In cos Ø 0.5) without derating.

### ATyS d H - 3 Pole, 4 Pole - Fixed Type

HSN Code: 85365010

Conforms to IEC 60947-6-1, IEC 60947-3

Rating	Poles	Reference	LP (₹)
4000A	3P	95333400	On Request
5000A		95333500	
6300A		95333630G	
4000A	4P	95334400	On Request
5000A		95334500	
6300A		95334630G	

# ATyS A - ATyS C

## Automatic Transfer Switching Equipment

From 125A to 3200A



### Function

ATyS A and ATyS C are 4 pole automatic transfer switches, with positive break indication. They incorporate the functions intended for mains/mains applications and mains/genset applications.

In automatic mode they enable the monitoring of, and the on-load changeover between, two power supply sources, in accordance with the parameters configured via DIP switches.

### General characteristics

- Main/Main or Main/Genset networks.
- ATS with 3 stable positions : I-O-II.
- Built-in mechanical interlock.
- RS485 Modbus communication with ATyS C.
- Door or DIN rail mounted controller.

### Advantages

#### Rapid commissioning

Voltage tapping and cable harness are supplied in a single package with motorised transfer switch and ATS controller. ATyS A and C switches offer significant time saving during commissioning (process takes 2 to 3 minutes). Owing to the design that allows commissioning through eight DIP switches, a screwdriver is all that is required.

#### Easy to use

The integrated design of the TSE offers an easy door mounting possibility of the ATS controller with the help of wire harness. Whilst providing an IP4x protection degree it enables an access to source availability and switch position visual information, as well as to the manual remote controls option.

#### Watchdog relay to check product availability

ATyS A and ATyS C products are equipped with a Watchdog relay which constantly monitors your product, thereby securing the installation.

This relay informs in real time the product's availability to the user, i.e. whether it is operational and ready for source switching operation.

# OFFICE WHATSAPP NUMBER : 9223310978

# ATyS A - ATyS C

Automatic Transfer Switching Equipment

From 125A to 3200A

# vrajlink.com

## ATyS A - ATyS C - 4 Pole

HSN Code: 85365010

Conforms to IEC 60947-6-1, IEC 60947-3

Solution		Automatically operated			
		ATyS A		ATyS C	
Standard Configuration Includes		<ul style="list-style-type: none"> <li>- Switch</li> <li>- Handle</li> <li>- Controller with Harness</li> <li>- Bridging Bars upto 1600A</li> <li>- Voltage sensing kit</li> </ul>		<ul style="list-style-type: none"> <li>- Switch</li> <li>- Handle</li> <li>- Controller with RS 485 port with Harness</li> <li>- Bridging Bars upto 1600A</li> <li>- Voltage sensing kit</li> </ul>	
Rating	Poles	Reference	LP (₹)	Reference	LP (₹)
125A	4P	95154012SL	122030	95254012SL	On Request
160A		95154016SL	124286	95254016SL	On Request
200A		95154020SL	126432	95254020SL	On Request
250A		95154025SL	149294	95254025SL	On Request
315A		95154031SL	151082	95254031SL	On Request
400A		95154040SL	179668	95254040SL	On Request
500A		95154050SL	190390	95254050SL	On Request
630A		95154063SL	218964	95254063SL	On Request
800A		95154080SL	299668	95254080SL	On Request
1000A		95154100SL	351478	95254100SL	On Request
1250A		95154120SL	423558	95254120SL	On Request
1600A		95154160SL	517174	95254160SL	On Request
2000A		95154200G	738926	95254200	On Request
2500A		95154250G	809924	95254250	On Request
3200A		95154320G	1035134	95254320	On Request

# vrajlink07@gmail.com

# ATyS p

## Automatic Transfer Switching Equipment

From 125A to 3200A



ATyS p

### Advantages

#### Recording of events

ATyS p switches enable effective monitoring of your installation thanks to timestamped event recording. Events can be retrieved and read via communication.

#### Optional communication modules

The ATyS p offers communication functions through the addition of optional modules, such as the RS485 Modbus or Ethernet with embedded Webserver.

### Function

ATyS p are 3 or 4 pole automatic transfer switches with positive break indication. They incorporate all the functions offered by the ATyS t and g, as well as functions designed for power management and communication.

In automatic mode they enable the monitoring of, and the on-load changeover between, two power supply sources, in accordance with the parameters configured through LCD display, or via communication.

They are intended for use in low voltage power supply systems where a brief interruption of the load supply is acceptable during transfer.

### Configuration software

Software (Easyconfig) is available enabling the ATyS p parameters to be easily configured and the existing configuration to be saved and sent to other units ..

### Power measurements

ATyS p products are particularly suited to energy management and monitoring. In addition to their integrated power and energy measurement functions (with a 2% accuracy level), programmable inputs/outputs can be utilised to control load shedding based on a load level or tariff.

### ATyS p - 4 Pole

**HSN Code: 85365010**

Conforms to IEC 60947-6-1, IEC 60947-3

Solution		Automatically operated	
		ATyS p	
Standard Configuration Includes		<ul style="list-style-type: none"> <li>- Switch</li> <li>- Handle</li> <li>- Bridging Bars up to 1600A</li> <li>- Voltage Sensing Kit</li> </ul>	
Rating	Poles	Reference	LP (₹)
125A	4P	95734012SLVR	On Request
160A		95734016SLVR	
200A		95734020SLVR	
250A		95734025SLVR	
315A		95734031SLVR	
400A		95734040SLVR	
500A		95734050SLVR	
630A		95734063SLVR	
800A		95734080SLVR	
1000A		95734100SLVR	
1250A		95734120SLVR	
1600A		95734160SLVR	
2000A		95734200VR	
2500A		95734250VR	
3200A		95734320VR	

\* ATyS P - Optional RS485 & Ethernet Module

# When **energy** matters



## The choice of OEM and end users

- All-in-one solution, avoiding assembly issues
- Mechanical interlock providing isolation between sources
- Padlocking for safe maintenance operation
- Fire input Alarms and Genset Start/Stop
- Continuous product availability information
- Manual operation possible under load

**Enclosed ATyS**

Ranging from 40A - 800A

# Enclosed ATyS

Automatic Transfer Switching Equipment  
40A to 800A



Enclosed ATSE

### Advantages

#### Quick and hassle-free installation:

Efficient and timely installation is made possible with factory-fitted bridging bars and aluminium-compatible power terminals, simplifying the process of setting up the cabinet. Additionally, the ATyS controller comes pre-wired in-house, saving you valuable time during installation.

#### Fast commissioning & testing

The ATyS controller boasts 8 dip-switches, enabling swift commissioning, even offline. Essential functions such as remote position control, mode selection, lamp test, and genset test on load are easily accessible on the front of the product, ensuring quick and effortless operation.

### Function

Socomec ATyS enclosures are outfitted with high-quality motorized and automatic changeover switches. These switches continuously monitor the condition of your low voltage power sources, such as mains and backup generators, ensuring a seamless and automated transition between power sources whenever there is a disruption or voltage fluctuation.

ATyS enclosures are built for high-quality performance, quick installation, low-maintenance, and adaptability to meet diverse power requirements.

## vrajlink.com

#### Low-maintenance for optimal performance:

Our ATyS models feature self-cleaning contacts, reducing the need for frequent maintenance. Enjoy a hassle-free experience and peace of mind knowing that your automatic transfer switch enclosure is designed for long-lasting performance.

#### Highly adaptable to your needs

To meet various power demands, the ATyS automatic enclosed changeover switches family offers a wide range of ratings. This adaptability ensures that our products are better suited to cater to the unique requirements of your critical applications.

## vrajlink07@gmail.com

Enclosed ATyS - 4 Pole

HSN Code: 85365010

Solution		Automatic Transfer Switch Equipment ( ATSE )	
		ENCLOSED SOLUTION	
Standard Configuration Includes		- Switch - C25 Controller	
Rating	Poles	Reference	LP (₹)
40A	4P	87154004	91474
63A		87154006	93244
80A		87154008	95794
100A		87154010	100504
125A		87154012	103412
160A		87154016	134226
200A		87154020	136216
250A		87154025	159048
315A		87154031	166156
400A		87154040	192594
630A		87154063	224984
800A		87154080	350354

## OFFICE WHATSAPP NUMBER : 9223310978



# ATyS C25

## ATS Controller

Entry-level functionalities



ATyS C25

### Function

ATyS C25 is an entry level ATSE controller with communications. It can be used to pilot a remotely operated transfer switch, such as ATyS r, ATyS S and ATyS d M, as well as contactors type transfer switches, for circuit breaker type transfer switches see ATyS C55 and ATyS C65. ATyS C25 ensure the automatic or remotely controlled transfer from one source to another with fixed timers and thresholds.

### General characteristics

- Self-powered from sensing.
- Voltage supply range (184 - 300 VAC).
- DC aux power supply (for optional use).
- Main/Main or Main/Genset networks.
- Fixed I/Os.
- RS485 Modbus communication.
- Voltage sensing on all phases.
- Three-phase + Neutral & Single-phase + Neutral networks.
- Phase rotation checking.
- Door or DIN rail mounting.

### Advantages

#### Flexible space saving

The ATyS C25 controller can be mounted on either a DIN rail or to the panel door, offering flexibility and optimising space.

#### Cost-effective

The ATyS C25 has an integrated DPS, for supplying the motorisation of the switch, and can be door mounted, therefore there's no need for an external DPS or display, reducing installation time and costs.

### Fast commissioning & testing

- 8 dip-switches allow very fast commissioning, even offline.
- All main functions such as remote position control, mode selection, lamp test and genset test on load are available on the front of the product allowing quick and easy operation.
- Remote product information is available through RS485 Modbus communication.

### ATyS C25

HSN Code: 85381090

Reference	Description	LP (₹)
16000025	C25 Controller with RS485, for RTSE products	On Request

# ATyS C55

## ATS Controller

Mid-level functionalities



ATyS C55

### Function

ATyS C55 is a complete ATSE controller that can be used to pilot a remotely operated transfer switch of any technology: motorised switches (e.g. ATyS r, ATyS Sor ATyS d M), circuit breakers or contactors. ATyS C55 ensure the automatic or remotely controlled transfer from one source to another, with configurable timers and thresholds, for any combination of sources: 2 transformers, 1 transformer and 1 genset or 2 gensets.

### General characteristics

- Self-powered from sensing.
- Wide voltage range (88-576VAC).
- 24 VDC aux power supply (for optional use).
- 2 latching relays.
- Smart commissioning wizard.
- IP65 degree of protection with gasket (accessory).
- 1000 Alarms and Events.
- 6 fully configurable I/O.
- Genset scheduler.
- Door or back plate mounting.

### Advantages

#### Fast commissioning

On initial power up, the ATyS C55's smart wizard will guide the operator through the commissioning process.

#### Versatile

The ATyS C55 is compatible with contactors, breakers and switches. It can also work for all type of 2-source applications combining mains and gensets.

### Fast commissioning & testing

- High-resolution LCD screen with clear defined messages.
- Real-time pop-ups to show timers, alarms, faults and information alerts.
- Quick and easy access to main functions through the front face with direct key input.
- Complete configuration can be achieved through the front face or via software (EasyConfig).

### ATyS C55

HSN Code: 85381090

Reference	Description	LP (₹)
16000055	C55 Controller with RS485 port, suitable for ATyS   Circuit breaker   Contactor technologies	On Request

# ATyS C65

## ATS Controller

Advanced functionalities



ATyS C65

### Function

ATyS C65 is an advanced ATSE controller offering all the functions of the ATyS C55 with the addition of current, power & energy monitoring, increased I/O capacity and functions, load shedding, lift control function, energy backup, increased number of events and alarms (measurement and combination alarms) and DIRIS Digiware module compatibility.

### General characteristics

- Self-powered from sensing.
- Wide voltage range (88 - 576 VAC).
- 24 VDC aux power supply (for optional use).
- 2 latching relays.
- Digiware 10-10: I/O extension up to 30 inputs and 18 outputs.
- Power & Energy metering with /1 A or /5 A current transformers.
- Energy backup.
- IP65 degree of protection (panel gasket included).
- 3000 Alarms and Events.

### Advantages

#### Fast commissioning

On initial power up, the ATyS C65's smart wizard will guide the operator through the commissioning process.

#### User customisable

Front face LEDs, Load shedding, Genset schedulers and the lift control signal are just a few of the many customisable features available on ATyS C65.

### Fast commissioning & testing

- The high-resolution LCD screen provides several dashboards enabling easy monitoring of all parameters, including power and energy consumption of the loads.
- The integrated energy backup provides transitional power to the product enabling status indication (switch position, timer status, fault notifications) and communication to remain active with no supply present.
- Quick and easy access to main functions through the front face with direct key input.
- Complete configuration can be achieved through the front face or via software (EasyConfig).


### ATyS C65

HSN Code: 85381090

Reference	Description	LP (₹)
16000065	C65 Controller with RS485 com or ethernet webserver, suitable for ATyS   Circuit breaker   Contact technologies	On Request

### ATyS Accessories

HSN Code: 85381090



Reference	Description	LP (₹)
22994009	Shorting Links for ATyS a M	On Request
93240002	Shroud, 4P for ATyS a M	On Request
93350001	RS 485 module for ATyS a M	On Request
93350002	Fire Input module for ATyS a M	On Request
93350003	Genset start module for ATyS a M	On Request
95992010	HMI ATyS D10 compatible with ATyS d, t, g, p	10930
95992020	HMI ATyS D20 compatible with ATyS p, ATyS p M	12304
13094006	Bridging bars 40A - 125A for ATyS M	6366
13094016	Bridging bars 160A for ATyS M	12250
13994006	Voltage sensing kit for ATyS M	5144
13091001	Aux contact for ATyS a M and ATyS M (range from 25A – 160A) with 1 changeover for each position	6138
22944016	Terminal Shrouds for ATyS M	1214
48250204	Ethernet Module with RS 485 for ATyS p   Diris A30   Diris A41 (Modbus Gateway)	53226
48250203	Ethernet Module for ATyS p   Diris A30   Diris A41 (Modbus TCP or RTU over TCP protocol)	27952
48250092	RS 485 Modbus Communication	7070
15992001	2 Inputs/ Output modules for ATyS p	12760
15994001	Dual Power Supply for ATyS S   ATyS r	20368
93240003	Bridging Bars ATyS M 80-125A	On Request
93240005	Bridging Bars ATyS M 160A	
93240004	Shrouds ATyS A-D M 80-160A	

# Optimise your energy performance with **Socomec**



## Metering

Measurement and monitoring multi-circuit system  
**DIRIS Digiware**



Single & Three phase energy meters  
**COUNTIS E & P**



## Measure

Measurement and monitoring multi-circuit system  
**DIRIS Digiware**




Multifunction meters: PMD  
**Diris A series (10/20/30/40)**



Digital Multifunction Power meter  
**MULTIS M-18**



Electrical network analyser  
**DIRIS Q800**



## Centralise / Monitor / Analyse

Communication gateway  
**DIRIS M & D**



Energy management software  
**WEBVIEW**



PreciSense



Discover the video



VirtualMonitor



Discover the video



AutoCorrect



Discover the video



**DIRIS Digiware BCM**

Multi-circuit current acquisition module  
with integrated sensors

The DIRIS Digiware BCM allows  
the monitoring of all types of power  
distribution units (PDUs).

- 3x quicker to install than standard solutions
- 2x quicker to configure than standard solutions
- Minimal footprint
- Maximum reliability

# COUNTIS E

Active Energy Meters  
from 40A to 12000A



Countis E Series

## Function

COUNTIS E is a range of modular electrical energy meters that provide an overview of energy consumed and produced, and also display power information and other measurements directly on the backlit LCD. COUNTIS E meters have native Ethernet communication capability and are fully integrated into the SOCOMEC monitoring ecosystem including Webview, screens, gateways and configuration software.

## Advantages

### Quick setup

It's simple to create, edit and save product settings with the Easy config System.

### Advanced connectivity

COUNTIS E devices are available for all applications, including the most demanding, through advanced connectivity: Ethernet, Modbus, M-Bus

### Integrated web server

Easy data exploitation thanks to a free integrated web server accessible on a standard web browser.

### Reliable and safe

To guarantee a 100% reliable product, the COUNTIS E range is Accurate and reliable measurements - MID "Module B+D" directive certified.

### Multi-tariff

It's now possible to reduce costs thanks to the meter's multi-tariff function, which facilitates energy usage at the most advantageous times.

## COUNTIS E

HSN Code: 90318000

Reference	Description	LP (₹)
48503048	COUNTIS E17 1PH Direct 80A,Dual tariff, Active Energy Meter with Ethernet-MID	48592
48503055	COUNTIS E27 3PH Direct 80A,Dual tariff, Active Energy Meter with Ethernet - MID	65154
48503057	COUNTIS E48 3PH Dual Tariff Active Energy Meter via CT 1/5A up to 10000 A with Ethernet - MID	54548
48530000	COUNTIS ECi2 Multi-Utility Pulse concentrator With upto 7 Insulated Logical inputs	39232
48530001	COUNTIS ECi3 Multi-Utility Pulse concentrator With upto 7 Insulated Logical inputs+ 2 Analog inputs	44310

# COUNTIS P

Din Rail Type AC & DC energy meters

Connection via shunts upto 4000 A



Countis P Series

## COUNTIS P0x

### Function

COUNTIS P0x are single-phase modular electrical energy meters that enable viewing of the different energies consumed and produced, and also of powers and other measurements directly on the backlit LCD display. They enable direct connection up to 45 A and are suitable for use in sub-billing applications thanks to their MID certification.

## COUNTIS P1x

### Function

COUNTIS P1x are single-phase modular electrical energy meters that enable viewing of the different energies consumed and produced, and also of powers and other measurements directly on the backlit LCD display. They enable direct connection up to 100 A and are suitable for use in sub-billing applications thanks to their MID certification.

## COUNTIS P43-DC

### Function

COUNTIS P43-DC are modular electrical energy meters for direct current (DC), that enable viewing of the different energies consumed and produced, and also of powers and other measurements directly on the backlit LCD display. They connect indirectly via a wide range of measurement shunts.

## COUNTIS P3x

### Function

COUNTIS P3x are three-phase modular electrical energy meters that enable viewing of the different energies consumed and produced, and also of powers and other measurements directly on the backlit LCD display. They enable direct connection up to 100 A and are suitable for use in sub-billing applications thanks to their MID certification.

## COUNTIS P

HSN Code: 90318000

Reference	Description	LP (₹)
48505004	COUNTIS P04 1PH 45A MODBUS MID	8778
48505014	COUNTIS P14 1PH 100A MODBU MID	9372
48505034	COUNTIS P34 3PH 100A MODBU MID	18480
48505044	COUNTIS P44 CT1-5A MODBUS MID	20262
48505244	COUNTIS P44-2QCT 2RJ12 MOD MID	33154
48505444	COUNTIS P44-4QCT 4RJ12 MOD MID	43836
194S0425	QCT-C 3P BLOCK 25MM 40-160A	5940
194S0435	QCT-C 3P BLOCK 35MM 63-250A	6534
194S0445	QCT-C 3P BLOCK 45MM 160-630A	8168
194S0455	QCT-C 3P BLOCK 55MM 400-1000A	9066
194S0436	QCT-C-35 + 1X1M RJ12	10880

# MULTIS M-18

Digital Multifunction Power Meter

Three phases - via CT up to 9999A dimensions 96 \* 96 mm



Multis M-18

### Functions

The MULTIS M-18 is a panel mounted digital meter displaying multi-measurement and energy values directly on its large backlit LCD display.

It is designed for utilisation on three-phase or single-phase networks with connection via CT and is suitable for applications of up to 9999A. The product can be configured by the user via the keypad and the display.

[vrajlink07@gmail.com](mailto:vrajlink07@gmail.com)

### Advantages

#### Easy to use

Thanks to its large backlit LCD display and its multiple viewing screens with direct pushbutton access, MULTIS M-18 provide clear readings and are easy to use. They directly display a number of multi-measurement and metering values.

#### Advanced functionalities

The MULTIS M-18 offers input/output functions as standard and has a RS485 MODBUS communication output.

### MULTIS M-18

HSN Code: 90318000

Reference	Description	LP (₹)
192J9060	Multis M-18, class 0.5s, LCD screen, U, V, I, F, P, Q, S, PF, KWH, KVARH, THD V & I, Min Max values, Imp Exp, with RS 485, with 4 Digital Input and 2 Digital Output	11518

**OFFICE WHATSAPP NUMBER : 9223310978**

# DIRIS A-10

## Multifunction Meters - PMD

Measuring and monitoring - modular format



DIRIS A-10

### Functions

The DIRIS A-10 is a modular multifunction meter for measuring electrical values in low voltage networks with connection to current transformers.

It allows all electrical parameters to be displayed and utilised for communication and/or output functions.

### General characteristics

- Backlit LCD display.
- Direct access key for currents (instant and maximum), current THD and test function.
- Direct access key for voltages, frequency and voltage THD.
- Direct access key for active, reactive and apparent power (instantaneous and max. values) and power factor.
- Direct access key for energies.
- Pushbutton for hour meter, temperature and programming menu access.
- Metrological LED.

### Advantages

#### Easy to use

Five direct access pushbuttons enable all measurements to be clearly viewed on its backlit LCD display.

#### Integrated temperature sensor

It allows variations in temperature to be detected.

#### Detects wiring errors

An integrated test function can be utilised to detect incorrect wiring and to automatically correct CT installation errors.

### Compliant with IEC 61557-12

IEC 61557-12 is a high-level standard for all PMDs (Performance Monitoring Devices) that are designed to measure and monitor electrical parameters in distribution networks.

Compliance with IEC 61557-12 ensures a high level of equipment performance, in terms of metrology, and the mechanical and environmental aspects (EMC, temperature, etc.).

### DIRIS A-10

HSN Code: 90318000

Reference	Description	LP (₹)
48250400	DIRIS A10 W/O RS485, class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, THDi & V, Dual source	20928
48250401	DIRIS A10 With RS485, class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, THDi & V, Dual source	25332

# DIRIS A-20

## Multifunction Meters - PMD

Measurement and monitoring - door mounting



DIRIS A-20

### Functions

DIRIS A-20 units are performance metering and monitoring devices that provide the user with all of the measurements needed to complete energy efficient projects successfully and to provide assured monitoring of electrical distribution.

All of this information can be used and analysed remotely with the help of energy efficiency software programs.

### General characteristics

- Backlit LCD display
- Pushbutton for currents (instantaneous and maximum), THD currents and the connection correction function.
- Pushbutton for voltages, frequency and THD voltages.
- Pushbutton for power (instantaneous and maximum), active, reactive and effective, power factor.
- Pushbutton for energy sources and timer counter.

### Advantages

#### User-friendly operation

With its large backlit multiple-display screen with 4 hot keys, the DIRIS A-20 is easy to use.

#### Compliant with IEC 61557-12

Reference standard for PMDs (Performance metering & monitoring devices), IEC 61557-12 guarantees performance levels and satisfactory performance from the PMDs under the environmental conditions typical of industrial and tertiary applications.

#### Detects wiring errors

The DIRIS A-20 is equipped with an error correction function for CT connection.

### Customisable

Additional communication and input/output modules can extend the basic functional scope of this product. Equipped with additional modules, the DIRIS A-20 can provide the user with flexibility and expandability throughout the service life of the product.

### DIRIS A-20

HSN Code: 90318000

Reference	Description	LP (₹)
48250402	DIRIS A20,class 0.5s, V, I, F, P, Q, S, PF, kWh, kVARh, max kW, kVA, kVAR, THDi & V up to 50th row	22094

# DIRIS A-30/A41/A60

# VRAJ LINK

## Multifunction Measuring Unit - PMD

Measurement and advanced monitoring - door mounting



DIRIS A-30

### Functions

The DIRIS A-30 and A-41 are power monitoring devices that provide the user with all of the measurements needed to complete energy efficiency projects and to assure the monitoring of electrical distribution.

All the information can be used and analysed remotely using energy efficiency software packages.

### General characteristics

- Backlit LCD display
- Pushbutton for currents and for connection correction function
- Pushbutton for voltages and frequency..
- Pushbutton for active, reactive and effective powers and for power factor.
- Pushbutton for maximum and average values for currents and power levels.
- Pushbutton for harmonics.
- Pushbutton for electrical energy meters, timers and impulse counters

### Advantages

#### User-friendly operation

With its large backlit multiple-display screen with 6 hot keys, the DIRIS A-30 is easy to use.

#### Detects wiring errors

The DIRIS A-30 is provided with a correction function for TC wiring errors.

#### Customisable

The DIRIS A-30 can be equipped with additional modules that give the user flexibility throughout the service life of the product. Communication modules and additional digital or analogue inputs/outputs can be used to increase its range of functionality.

### Compliant with IEC 61557-12

Reference standard for PMDs (Performance metering & monitoring devices), IEC 61557-12 guarantees performance levels and satisfactory performance from the PMDs under the environmental conditions typical of industrial and tertiary applications.

[vrajlink.com](http://vrajlink.com)

### DIRIS A-30/A41/A60

HSN Code: 90318000

Reference	Description	LP (₹)
48250403**	DIRIS A30, class 0.5s, V, I, F, P, Q, S, PF, kWh, KVARh, kVAh, max & Avg(I, V, PF, kW, kVA, KVAR), THDi, V & I up to 63 <sup>rd</sup> row, 3ph current bar graph	26956
48250404	DIRIS A41, features same as DIRIS A30 + actual neutral current measurement through 4th CT	50712
48250207	DIRIS A 60, features same as DIRIS A30 + PQM Device for Voltage Sag, Swell & Current rise recordings	97802

\*\* Upto max 4 modules possible & in that upto 3 nos, 2IN/2OUT & for balance modules max 1 no. can be fitted.

**OFFICE WHATSAPP NUMBER : 9223310978**

# DIRIS A-30/A41/A60

Multifunction Measuring Unit - PMD

Measurement and advanced monitoring - door mounting

## DIRIS A - Accessories

HSN Code: 90319000

Reference	Description	LP (₹)
48250080	1 OUT A20 module	5228
48250082	RS485 A20 module	5426
48250090	2 Pulse A30/A41 module	5186
48250092	RS 485 Modbus Communication for ATyS p/Diris A30/41	7070
48250093	2 0/4-20mA Analog Output module A30/A41	13318
48250094	2IN/2OUT A30/A41 module for alarm/trip purposes for Max V,I,F,P,Q,S, Temp,THD,V & I parameters	9622
48250097	Memory Module for A30/A41 with RTC & with storage for P+,P-,Q+,Q-, last Max/Min values for V,I,F,P,Q,THD,V & I	20530
48250203	Ethernet Module for ATyS p/Diris A30/41(MODBUS TCP or RTU over TCP protocol)	27952
48250204	Ethernet Module with RS 485 for ATyS p/DirisA30/41 (Modbus gateway)	53226
48250205	PROFIBUS-DP A30 module	24948
48250206	Temperature module - Temp indication(Internal+3 External sensors PT 100)	23378

[vrajlink07@gmail.com](mailto:vrajlink07@gmail.com)

## DIRIS Q800

HSN Code: 90318000

Reference	Description	LP (₹)
48260100	Diris Q800 Electrical network analyser with 192 x 144 mm color touchscreen for power quality/flicker/transient measurements/current waveform/Fresnel diagram	On Request



|| श्री गणेशाय नमः ||      || जे जे श्री गोकुलेश ||

**Dipenbhai Kadakia**      **Chiragbhai Kadakia**  
MOBILE : +91-9619800070      MOBILE : +91-9833935831

## VRAJ LINK

1st Choice for Changeover & Automatic transfer switch (Atys) Specialist

-: AUTHORISED DISTRIBUTORS :-

**ASCO** Power Technologies  
By

**Schneider** Electric

**HPL**

**elmex**  
since 1963

**Socomec** VERITEK  
Innovative Power Solutions

**Prok dv's**  
... a mark of quality

**Finolex**  
Cables Limited

**AXON**  
Electric

**ELMEASURE**  
Possibilities... Infinite

**Be** Switchgear India  
THE REAL SWITCHGEAR

Admin. Off.: Shop No. 17, Gr. Flr., Opp. Electric Crematorium, 66/74 Chandanwadi, Marine Lines (e), Mumbai - 400 002. Tel.: +91 9223310978 E-mail : [vrajlink09@gmail.com](mailto:vrajlink09@gmail.com) Website : [www.vrajlink.com](http://www.vrajlink.com)

# DIRIS A-40

## Multifunction Measuring Unit - PMD

Measurement, monitoring and event analysis with smart sensors - door mounting



DIRIS A-40

### Functions

The DIRIS A-40 is a panel-mounted power monitoring device (PMD). It is designed for measuring, monitoring and reporting electrical energy.

The DIRIS A-40 offers a range of functions for measuring voltage, current, power, energy and quality. It allows the analysis of a single-phase or three-phase load.

### General characteristics

- Backlit LCD display
- Pushbutton for currents and for connection correction function
- Pushbutton for voltages and frequency..
- Pushbutton for active, reactive and effective powers and for power factor.
- Pushbutton for maximum and average values for currents and power levels.
- Pushbutton for harmonics.
- Pushbutton for electrical energy meters, timers and impulse counters

### Advantages

#### Assisted configuration

The configuration wizard guides the user step by step. It also detects and corrects configuration errors. This cuts the commissioning time in half and always delivers a reliable result.

#### Smart sensors

Three current sensor formats (solid-core TE, split-core TR/ iTR and Rogowski coil TF) allow integration of the DIRIS A-40 into new and existing electrical installations.

### Connected to the Cloud

The range comprises IoT ready connected products that enable data to be exported automatically for remote operation without any limit on time, distance and time in storage.

### Compliant with IEC 61557-12

Reference standard for PMDs (Performance metering & monitoring devices), IEC 61557-12 standard guarantees performance levels and satisfactory performance from the PMDs under the environmental conditions typical of industrial and tertiary applications.

### DIRIS A-40

HSN Code: 90318000

Reference	Description	LP (₹)
48250500*	Diris A40 RS485,3I 20,CI 0.2,V, I, F, P, Q, S, PF, kWh, kVARh, kVAh, max & Avg( I, V, PF, kW, kVA, kVAR), THDi, V & I up to 63 <sup>rd</sup> row ,PQM Device for Voltage Sag,Swell & Current rise recordings	57886
48250501*	Diris A40 Ethernet,3I 20,CI 0.2,V, I, F, P, Q, S, PF, kWh, kVARh, kVAh, max & Avg( I, V, PF, kW, kVA, kVAR), THDi, V & I up to 63 <sup>rd</sup> row ,PQM Device for Voltage Sag,Swell & Current rise recordings, webview function inbuilt	69282
48250502*	Diris A40 Profibus,3I 20,CI 0.2,V, I, F, P, Q, S, PF, kWh, kVARh, kVAh, max & Avg( I, V, PF, kW, kVA, kVAR), THDi, V & I up to 63 <sup>rd</sup> row ,PQM Device for Voltage Sag,Swell & Current rise recordings	71346

\* Mandatory to choose RJ12 cables & Adaptor Sensors with A40 meter for CT connections



# DIRIS A-100/A-200

## Multifunction Meters - PMD

Measurement and monitoring - door mounting



DIRIS A-200

### Plug & play

- Unique RJ12 technology enables the quick, error-free and safe connection of current sensors.
- Simple and fast configuration through a step-by-step wizard, even for the most advanced features.
- Integrated Virtual Monitor technology enables the smart monitoring of protective devices with no auxiliary contacts and no extra wiring.

### Best-in-class accuracy

PreciSense technology provides industry-leading accuracy which exceeds standards for billing, ensuring reliable and repeatable measurements under all conditions:

- Class 0.1 for the meter alone, according to IEC 61557-12 standard.
- Class 0.5 from 2% to 120% of the CT rating for the global measurement chain.
- Class 0.1s for active energy

### Functions

The DIRIS A-100 / A-200 are panel-mounted power quality meters that can communicate either via MODBUS RTU over RS485, MODBUS TCP over Ethernet or BACnet IP. The device's four RJ12 independent current inputs enable the management of multiple circuits of several different types: for example, 4 single-phase loads or 1 three-phase load + 1 single-phase load. A core-balance toroid can be fitted onto the A-200 for additional residual current monitoring. Most types of sensors are compatible: solid-core, split-core or flexible Rogowski coils through quick-connect RJ12 sensors.

### Advantages

#### The ultimate all-purpose power quality meter

- Native universal communication and digital inputs/outputs, eliminating the need for additional optional modules.
- Power supply up to 600VAC and network voltage monitoring up to 1039VAC.
- Multi-load management – up to 4 loads monitored on the same DIRIS A-100/A-200.

### Advanced features\*

- Waveform capture automatically triggered upon power quality events (voltage sag, swell, interruption, overcurrent) for the rapid identification of power system disturbances.
  - ITIC/CBEMA curves management.
  - Residual current monitoring through corebalanced toroids.
- \*Applies only to the DIRIS A-200 product*

### Fully customizable

- Splash screen and embedded webserver are easy to customise with your own brand logo and pictures.
- Customisable stand-by screen will display the measurement datasets that matter most to you.

DIRIS A-100/A-200

HSN Code: 90318000

Reference	Description	LP (₹)
48250600	DIRIS A-100 with RJ12 SENSORS + RS485 Modbus	On Request
48250604	DIRIS A-200 with RJ12 SENSORS + Ethernet Modbus TCP + RS485 Modbus	

# Integrated Technologies

Groundbreaking Technologies for Greater Simplicity and Performance



## PreciSense

Products that are setting new standards in measurement accuracy

The PreciSense technology ensures 100% reliable accuracy across the global measurement chain.

Be guaranteed of the accuracy of your measurements:

- for the global measurement chain,
- for reliable measurements,
- for relevant corrective actions.

PreciSense offers the best accuracy on the market regardless of the type of current sensors used (solid core, split core, flexible or embedded in the DIRIS Digiware S module).



Discover the video



## VirtualMonitor

The simple and cost-saving solution for monitoring your protective devices

The VirtualMonitor technology enables an advanced monitoring of protective devices at all levels within the electrical installation.

Virtual Monitor:

- detects the position and status of the protective device,
- detects if the breaker has tripped,
- counts the number of operations and trips.

VirtualMonitor technology monitors the status of protective devices:

- On your entire electrical installation (without additional space).
- Remotely and in real-time.
- Without additional hardware or wiring (without adding auxiliary contacts).



Discover the video



## AutoCorrect

Software elimination of wiring errors

The AutoCorrect technology ensures that the measurement is properly wired at all times, thus avoiding on-site interventions.

AutoCorrect ensures the operation of the proper measuring system thanks to simple and rapid detection of wiring errors:

- automatic wiring control (voltage/current phase association),
- correction of errors with a single click,
- feature available off-load.

Error correction's are carried out without any physical modification to the wiring.




Discover the video



PreciSense, VirtualMonitor and AutoCorrect technologies are embedded in Socomec's power monitoring solutions.

## Power metering and monitoring system for AC electrical installations

- DIRIS Digiware S with its 3 integrated sensors and DIRIS Digiware I associated with iTR sensors.

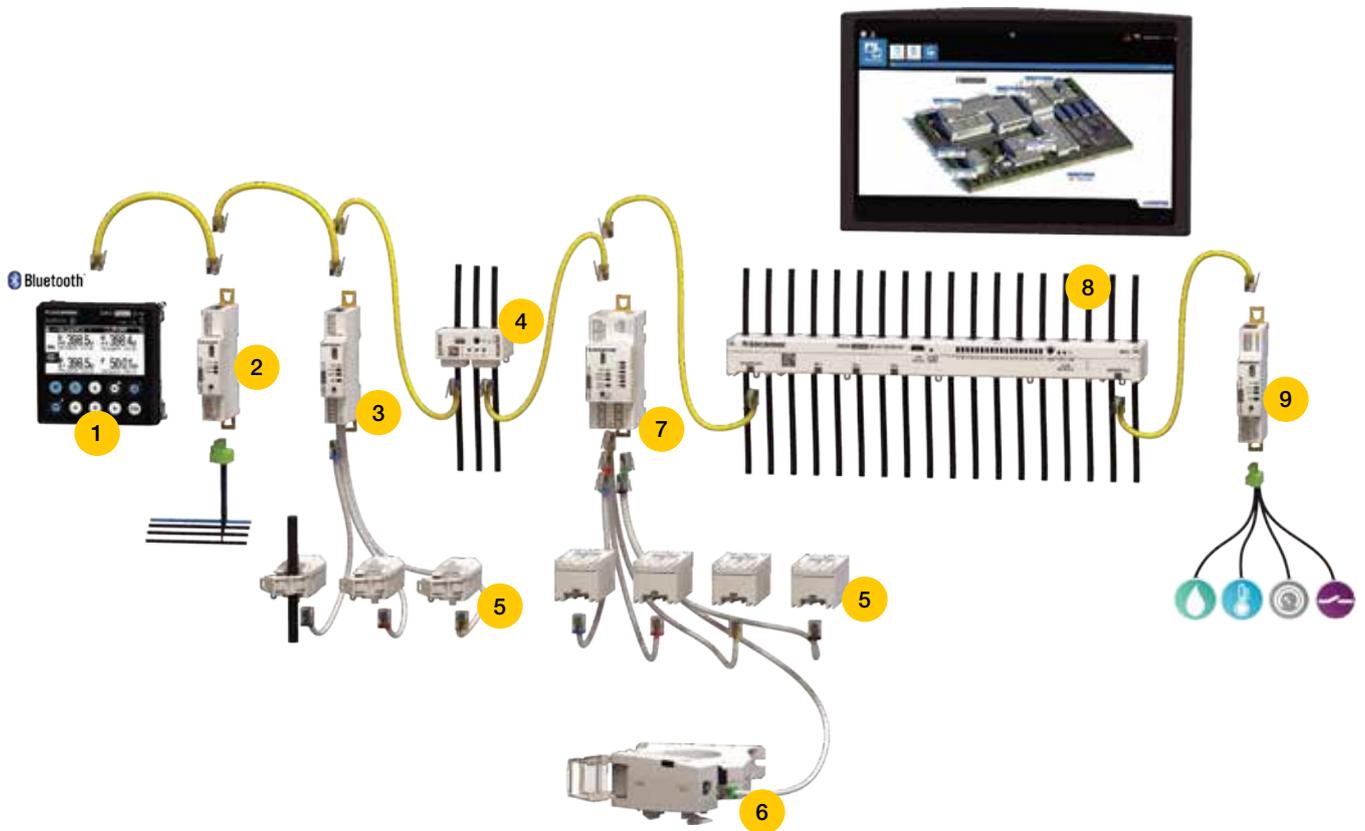

- |   |   |   |  |
|---|---|---|--|
| 1 | Multipoint display and communication gateway<br><b>DIRIS Digiware D</b>       | 6 | Differential toroids $\Delta$ IC   |
| 2 | Voltage measurement module<br><b>DIRIS Digiware U</b>                         | 7 | Residual Current Insulation Monitor (RCM)<br><b>DIRIS Digiware R-60</b>                    |
| 3 | Current measurement modules<br><b>DIRIS Digiware I</b>                        | 8 | Current measurement module for power distribution units (PDU)<br><b>DIRIS Digiware BCM</b> |
| 4 | Current measurement module with integrated sensors<br><b>DIRIS Digiware S</b> | 9 | Digital and analogue input/output modules<br><b>DIRIS Digiware IO-10/IO-20</b>             |
| 5 | Current sensors<br><b>TE/TR/iTR/TF sensors</b>                                |   |  |

# Selection guide

## Power Monitoring System AC

### DIRIS Digiware AC

#### Build your own AC system

System interface, displays and gateways  
(24 VDC)

Bluetooth Bluetooth

or or

**DIRIS Digiware D** display  
**DIRIS Digiware M** gateway  
**DIRIS Digiware C** RS485 interface

Voltage acquisition module

**DIRIS Digiware U**

Current acquisition module with integrated sensors

MID CERTIFIED

**DIRIS Digiware BCM** 21 circuits

**DIRIS Digiware S**  
**DIRIS Digiware BCM** 18 circuits

Current acquisition modules

MID CERTIFIED MID CERTIFIED MID CERTIFIED

**DIRIS Digiware I-3x** 3 inputs  
**DIRIS Digiware I-4x** 4 inputs  
**DIRIS Digiware I-6x** 6 inputs

Current sensors

**TE** Solid  
**TR/iTR** Split-core  
**TF** Flexible

Digital and analogue input/output modules

**DIRIS Digiware IO**

#### Find the best DIRIS Digiware configuration!



The Socomec Meter Selector is your digital assistant, helping you find the best DIRIS Digiware configuration for your power monitoring projects, and all in just a few clicks!

- Fill in information regarding your project.
- Download the system diagram and bill of material.
- All your projects are archived in your personal account.

# DIRIS Digiware M

## Multi-protocol Communication Gateways

For the DIRIS Digiware system



DIRIS Digiware M

### Advantages

#### Plug & Play

- Direct Digiware and RS485 to Ethernet gateway.
- Automatic detection of connected devices.
- Easy setup.
- Safety Extra Low Voltage 24 VDC power supply.

#### Advanced connectivity

- Ethernet output for communication using multiple protocols: Modbus TCP, BACnet IP and SNMP v1, v2, v3 (encrypted) to suit any metering and power monitoring application.
- Possible to configure as RS485 slave to communicate measurement data to a second PLC, for example.

#### Embedded web server

A WEB-CONFIG is embedded in the M-50 gateway to configure the communication architecture. WEBVIEW-M is embedded in the M-70 gateway and available without license fees to visualise measurements and consumption remotely.

### Functions

The DIRIS Digiware M-50 and M-70 communication gateways are the access point for the DIRIS Digiware system, centralising the 24 VDC power supply and communication in one single point. The M-50 and M-70 act as the Ethernet gateway for all the devices connected on the Digiware or RS485 bus, and integrate a web server to configure the network parameters and to remotely display measurement data.

The M-50 and M-70 gateways offer a wide range of functionalities, including:

- Bluetooth connectivity to collect data from environmental sensors,
- memory extension for connected devices,
- automatic export of logged consumption and data to an FTP(S) server,
- notification emails if there is an alarm on one of the connected devices (SMTPS),
- automatic time synchronisation of all connected devices via SNTP.

### Cyber security

The M-50 and M-70 gateways include advanced cyber security features following the IEC 62443 referential to secure the transmission of data and reduce the risk of cyber attacks:

- customised security policy (blocking or restricting certain protocols and services),
- secured HTTPS navigation by uploading TLS/SSL certificates,
- secured data push (FTPS, SMTPS),
- implementation of a Firewall and Whitelist rules to guard against denial-of-service attacks.

### Email notifications

The M-50/M-70 gateway can send email notifications in case of an alarm.

### DIRIS Digiware M

HSN Code: 90318000

Reference	Description	LP (₹)
48290221	M50 : Multi-Protocol ethernet gateway	On Request
48290222	M70 : Multi-protocol ethernet gateway with embedded WEBVIEW-M web server	

# DIRIS Digiware BCM

Multi-circuit Current Acquisition Module with Integrated Sensors for Power Distribution Units (PDU)

For 18 or 21 circuits



DIRIS Digiware BCM

## Advantages

### 3x quicker to install than standard solutions

- The integrated current sensors do not require any wiring: they are directly integrated in the module.
- Quick RJ45 connection between modules.
- RJ12 connection for external current sensors.
- Integrated AutoCorrect technology that provides automatic wiring control and an error correction feature available off-load.

### Maximum reliability

- A robust protective plastic cover safeguards the electronic components and reduces the risk of breakage. By not simply being an exposed PCB, the unit can, therefore, be handled manually.
- PreciSense technology ensures accurate and reliable measurements over a wide measurement range: class 0.5 accuracy for active energy according to IEC 61557-12 and ANSI C12.20 standards.
- Integrated VirtualMonitor technology to access the monitoring of protective devices across the entire electrical installation, both remotely and in real-time.

## Functions

The DIRIS Digiware BCM is a multi-circuit current measurement module with 18 or 21 integrated sensors and allows the monitoring of all types of power distribution units (PDUs). These modules are also equipped with three RJ12 channels allowing them to be connected to TE/TR/iTR/TF current sensors using RJ12 cables and various  $\Delta$ IC differential toroids.

## General characteristics

- 18/21 integrated current sensors.
- Measures up to 120 A.
- Configurable as 18/21 single-phase circuits or 6/7 three-phase circuits.

### 2x quicker to configure than standard solutions

Easy Config System Software - free of charge – enables the configuration of multiple identical panels with a “duplication” function and also provides time-saving configuration templates enabling the initial design to be adapted with ease.

### Minimal footprint

- No additional CT leads required - and therefore less cabling required.
- VirtualMonitor technology indicating the status of the protection elements eliminates the need to install auxiliary contacts.
- Connection to TE/TR/iTR/TF current sensors and  $\Delta$ IC differential toroids to mutualize power consumption and residual current monitoring.


## DIRIS Digiware BCM

HSN Code: 90318000

Reference	Description	LP (₹)
48290165	18 current inputs (18mm pitch)	On Request
48290166	18 current inputs (18mm pitch) + Virtual Monitor	
48290167	21 current inputs (19mm pitch)	
48290168	21 current inputs (19mm pitch + Virtual Monitor)	

## DIRIS Digiware System

### Architecture

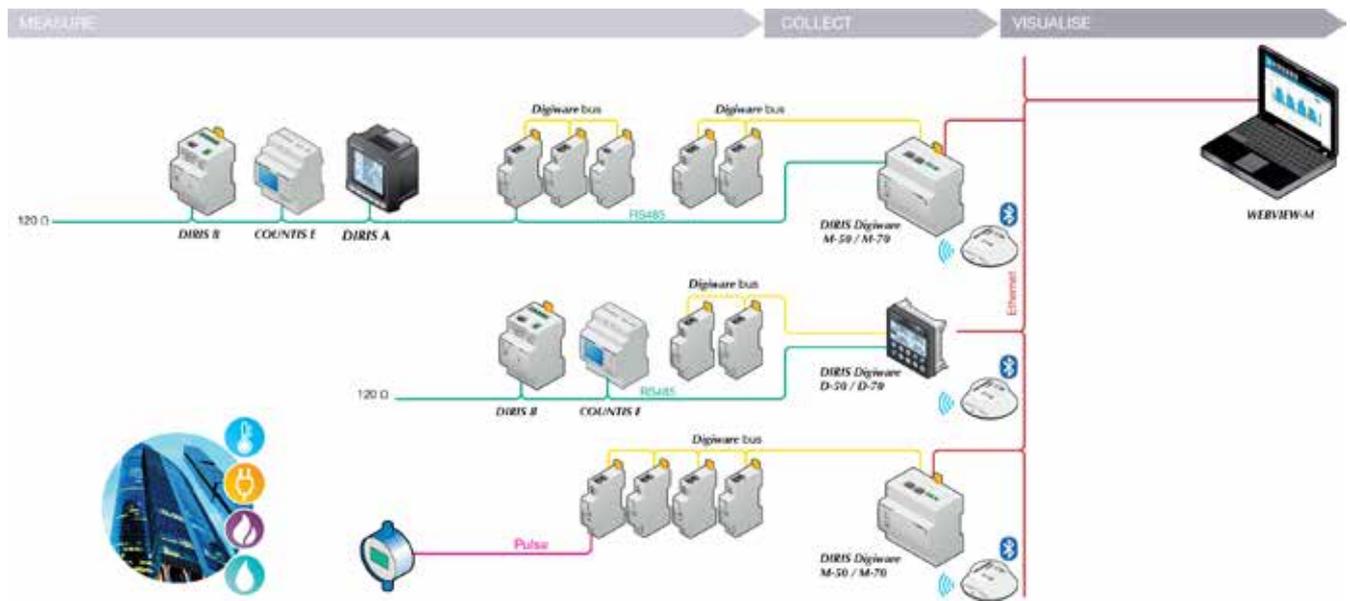

### Monitoring Devices

HSN Code: 90318000

Reference	Description	LP (₹)
48290010	DIRIS B-10 RS485-MODBUS-230VAC	On Request
48290000	DIRIS B-30 RS485-MODBUS-230VAC	



### Diris Optional Modules

HSN Code: 90319000

Reference	Description	LP (₹)
48290030	DIRIS O-iod DIGITAL MODULE	On Request
48290031	DIRIS O-ioa 0/4-20mA MODULE	
48290032	DIRIS O-it TEMPERATURE MODULE	
48290033	DIRIS O-m MODBUS RS485 MODULE	
48290034	DIRIS O-p PROFIBUS DP MODULE	



### Power Supply

HSN Code: 90319000

Reference	Description	LP (₹)
48290120	P15 AUX SUPPLY 100-240VAC->24 VDC 15W	On Request
47290603	P30 Aux Supply 100-240VAC- > 24VDC 20W	



### Diris Digiware Input/Output Modules

HSN Code: 90319000

Reference	Description	LP (₹)
48290140	IO-10- 4 digital inputs/2 output module	On Request
48290145	IO-20 - 2 analogue input module	



### Display

HSN Code: 90319000

Reference	Description	LP (₹)
48290200	DIRIS D-30 Single-point display	On Request
48290204	DIRIS D-50 Multi-point display - Ethernet output	
48290203	DIRIS D-70 Multi-point display - Webview Webservice - Ethernet output	



### Blind Interface & Repeater

HSN Code: 90319000

Reference	Description	LP (₹)
48290101	C-31 SYSTEM INTERFACE	On Request
48290103	C-32 REPEATER	



### Voltage Sensing Module

HSN Code: 90319000

Reference	Description	LP (₹)
48290105	U-10 VOLTAGES INPUTS METERING	On Request
48290102	U-30 VOLTAGES INPUTS ANALYSIS	



**Closed Type Current Sensor**

HSN Code: 90319000

Reference	Description	LP (₹)
48290500	TE-18 20A SOLID CORE	On Request
48290501	TE-18 63A SOLID CORE	
48290502	TE-25 160A SOLID CORE	
48290503	TE-35 250A SOLID CORE	
48290504	TE-45 630A SOLID CORE	
48290505	TE-55 1000A SOLID CORE	
48290506	TE-90 2000A SOLID CORE	



**Open Type Current Sensor**

HSN Code: 90319000

Reference	Description	LP (₹)
48290555	Split core - TR-10 - 25- 63A	On Request
48290556	Split core - TR-14 - 40 -160A	
48290557	Split core - TR-21 - 63-250A	
48290558	Split core - TR-32- 160 - 600A	



**Current Sensing Module**

HSN Code: 90319000

Reference	Description	LP (₹)
48290110	I-30 3xI METERING	On Request
48290111	I-31 3xI METERING + TREND	
48290112	I-60 6xI METERING	
48290113	I-61 6xI METERING + TREND	
48290130	I-35 3xI ANALYSIS	
48290129	I-43 4xI MONITORING 2I/2O	
48290131	I-45 4xI ANALYSIS 2I/2O	



**Flexible Current Sensor**

HSN Code: 90319000

Reference	Description	LP (₹)
48290573	TF-40 100 - 400A	On Request
48290570	TF-55 150 - 600A	
48290574	TF-80 150 - 600A	
48290575	TF-120 400 - 2000A	
48290576	TF-200 600 - 4000A	
48290577	TF-300 1600 - 6000A	
48290578	TF-600 1600 - 6000A	



### RJ45 Cables

HSN Code: 90319000

Reference	Description	LP (₹)
48290181	RJ45-0.32 feet / 0.10m CABLE	On Request
48290188	RJ45-0.64 feet / 0.20m CABLE	
48290182	RJ45-1.64 feet / 0.50m CABLE	
48290183	RJ45-3.28 feet / 1m CABLE	
48290184	RJ45-6.56 feet / 2m CABLE	
48290186	RJ45-16.4 feet / 5m length CABLE	
48290187	RJ45-32.8 feet / 10m length CABLE	
48290185	RJ45 cables for BUS Digiware 164 feet / 50 m + 100 connectors	



### RJ12 Cables

HSN Code: 90319000

Reference	Description	LP (₹)
48290580	RJ12 3x0.1m CABLE	On Request
48290581	RJ12 3x0.2m CABLE	
48290582	RJ12 3x0.3m CABLE	
48290583	RJ12 3x1m CABLE	
48290584	RJ12 3x2m CABLE	
48290588	RJ12 4x1m CABLE	
48290589	RJ12 4x2m CABLE	
48290590	RJ12 6x0.1m CABLE	
48290591	RJ12 6x0.2m CABLE	
48290592	RJ12 6x0.3m CABLE	
48290593	RJ12 6x1m CABLE	
48290594	RJ12 6x2m CABLE	
48290595	RJ12 3x0.5m CABLE	
48290596	RJ12 4x0.5m CABLE	
48290597	RJ12 6x0.5m CABLE	
48290602	RJ12 1 cable of 16.6ft/5m	
48290603	RJ12 1 cable of 32.8ft/10m	
48290601	RJ12 1 Cable of 164ft/50m and 100 connectors	



### Accessories

HSN Code: 90319000

Reference	Description	LP (₹)
48290049	SEALING KIT DIRIS B30	On Request
48290050	USB CONFIGURATION CABLE	
48290180	END LINE RESISTANCE RJ45	
48290598	SPLICE PLATE x30	
48290599	CT/5A to 100 MV ADAPTOR	
48290600	SEALABLE COVER x20	
48290280	RJ9 1x1,5m	
48290281	RJ9 1x3m	



The product is available till stocks exists.

## COUNTIS E

HSN Code: 90318000

Reference	Description	LP (₹)
48503058	COUNTIS E00 1PH,Direct 40A,Active Energy Meter,1 Module width(18 mm) with vertical LCD display	On Request
48503039	COUNTIS E03 1PH,Direct 40A,Active Energy Meter,1 Module width(18 mm) with vertical LCD display with MODBUS	
48503043	COUNTIS E13 1PH Direct 80A,Dual tariff, Active Energy Meter with MODBUS	
48503047	COUNTIS E17 1PH Direct 80A,Dual tariff, Active Energy Meter with Ethernet	
48503062	COUNTIS E21 3PH Direct 80A Dual tariff, Active Energy Meter with pulse output	
48503050	COUNTIS E23 3PH Direct 80A,Dual tariff, Active Energy Meter with MODBUS	
48503054	COUNTIS E27 3PH Direct 80A,Dual tariff, Active Energy Meter with Ethernet	
48503005	COUNTIS E30 3PH Direct 100A,Active Energy Meter with pulse output	
48503006	COUNTIS E31 3PH Direct 100A Dual tariff, Active Energy Meter with pulse output	
48503012	COUNTIS E33 3PH Direct 100A,Dual tariff, Active Energy Meter with MODBUS	
48503063	COUNTIS E41 3PH Dual Tariff Active Energy Meter via CT/5A upto 12000 A	
48503065	COUNTIS E43 Dual Tariff Active Energy Meter via CT/5A upto 12000 A & with RS485	

## COUNTIS M

HSN Code: 90318000

Reference	Description	LP (₹)
48C03018	M03 1phase 45A direct - with Modbus communication via RS485; I,V,P,Q,S ,PF & 2Pulse Output Cl:1.0	On Request
48C03019	M13 1Phase 100 A direct - with MODBUS communication via RS485; I,V,P,Q,S ,PF & 2Pulse Output Cl:1.0	
48C03020	M33 3Phase 100 A direct - with MODBUS communication via RS485; I,V,P,Q,S,PF, load curves and THD & 2 Pulse Output Cl:1.0	
48C03021	M43 3Phase CT 5A input with RS485 MOSBUS communication; I,V,P,Q,S ,PF,load cuves and THD & 2 Pulse Output Cl:0.5	