




VRAJ LINK

Advantages:

- ▶ Highly linear
- ▶ Highly accurate
- ▶ Light in weight

Applications:

- ▶ For detection of Earth Fault current

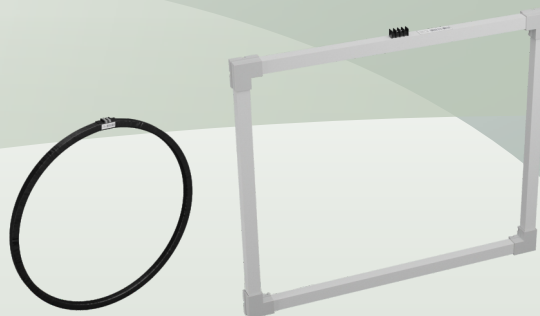

Technical specifications

System Voltage	720V max.
Insulation Voltage	3 kV for 1 minute
System Frequency	50/60 Hz
Maximum permissible current	1 kA continuous 5 kA for 1.5 sec
Current Output	/5 A or /1 A


Mechanical Specifications

Terminal conductor	2.5 sq.mm
Enclosure	ABS/ Tape wound
Standard sizes	300mm, 100mm or Rectangular 300x100mm 250x100 mm, 450x550 mm, 300x100 mm or any other on request



Environmental Specifications

Operating Temperature	-20°C to 70°C
Humidity	< 95 RH

Connection Diagram

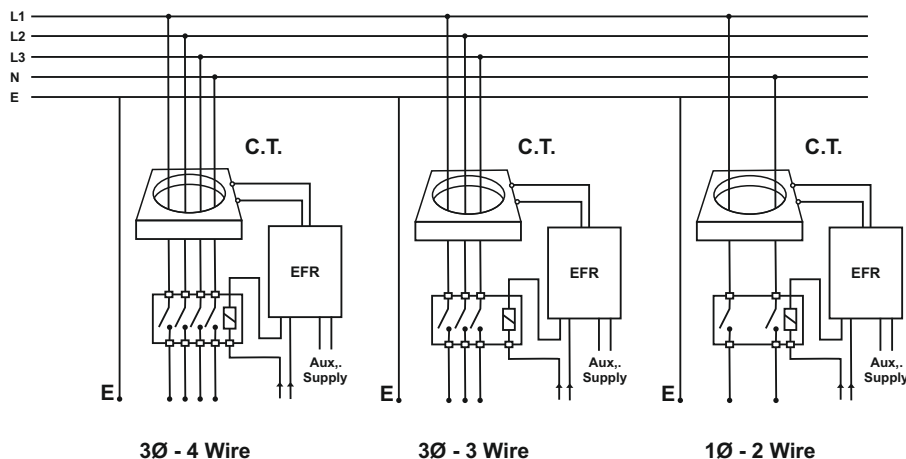

vrajlink.com

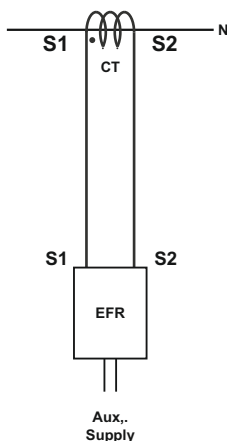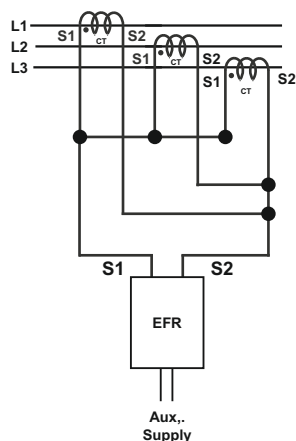

vrajlink07@gmail.com

OFFICE WHATSAPP NUMBER : 9223310978