

Features:**vrajlink07@gmail.com**

- Current display in percentage
- User settable trip level and timer delay
- Panel mount
- CBCT open circuit detection
- CBCT available in various sizes
- Compliance with IEC 947-1

**Advantages:****vrajlink.com**

- Door mount
- Protects human life
- Constant leakage current detection
- Fewer nuisance trips

Applications:

- Generator Control Panel
- Distribution Control Panel
- Protection Control Panel

Input Specification

Status	Normally de-energised
Reset	Manual

Output Specifications

Trip Relay Output	80-90% of Range 1 SPDT switch NO (5A and 240V AC) NC (5A and 240V AC).
Alarm Relay Output (Optional)	50% of Range 1 SPDT switch NO (5A and 240V AC) NC (5A and 240V AC)
Relay Contacts	1 potential free contact (NO,C & NC)

Functional Specifications

Set Point	0.03, 0.10, 0.30, 0.50, 1.0, 3.0, 5.0, 10.0, 20.0 & 30.0 A
Power ON Delay	Approx. 1 sec
Trip time Delay	0.04 to 10 sec (range)
CBCT Sizes	35mm, 70mm, 120mm and 210 mm any other circular/rectangular size on request

Supply Specifications

Supply Voltage	90-270V AC/ DC ($\pm 15\%$)
Supply Frequency	50/60 Hz
Power Consumption	3VA max.

Environmental Specification

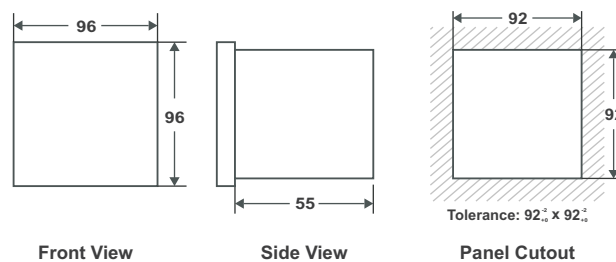
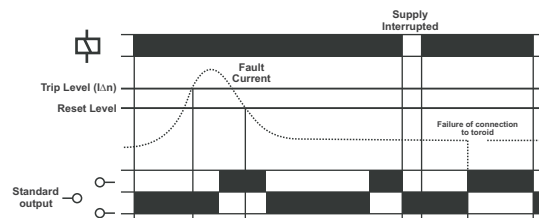
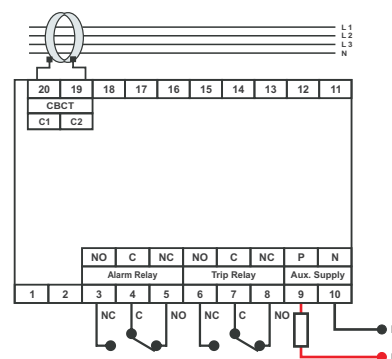
Operating Temperature	-10°C to 70°C
Storage Temperature	-20°C to 50°C
Humidity	Up to 95% RH

Mechanical Specification

Weight	228 g
Dimensions	96X96X48mm (WxHxD)
Mounting	Door Mount
Enclosure	ABS Thermoplastic

User Settable Parameters

Range Set	0.03, 0.10, 0.30, 0.50, 1.0, 3.0, 5.0, 10.0, 20.0 & 30.0 A
Delay Set	0.04, 0.06, 0.15, 0.25, 0.5, 0.8, 1, 2.5, 5, 10 Sec

Dimension**Functional Diagram****Connection Diagram****Ordering Information**

Ordering Code	Description
VIPS 98PF	Flush mounted digital ELR, current rating 30 mA- 30 A, SMPS based