

Features:

- ▶ Large Setting Range
- ▶ Small size
- ▶ Simple to mount
- ▶ High switching performance

vrajlink.com


VIPS THNC: Thermostat (normally Closed); Contact Breaker for regulating heaters

VIPS THNO: Thermostat (Normally open); contact maker for regulating filter fans and heat exchangers or for switching signal devised when temperature limit has been exceeded.

Applications:

- ▶ Heater
- ▶ Fan
- ▶ Signal devices

vrajlink07@gmail.com
Technical specifications

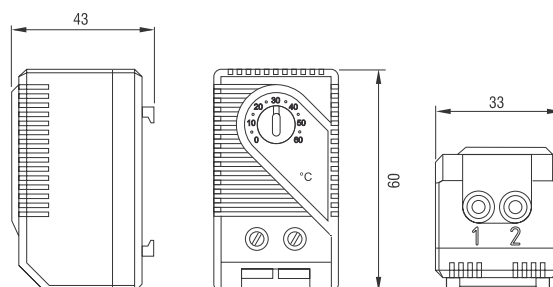
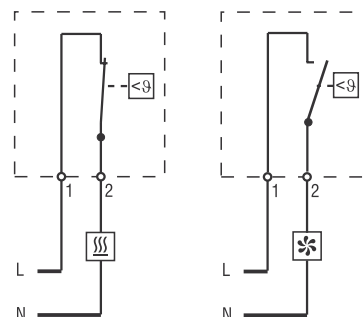
Setting Range	0 to 60°C
Switch Temperature difference	10°C +/- 4°C
Sensor Element	Thermostatic Bimetal
Contact Type	Snap action
Contact Resistance	<10 mΩ
Service Life	>1,00,000 cycles
Maximum Switching Capacity	NC: 10 A resistive/ 2A Inductive at 250VAC NO: 5A resistive/ @ A inductive at 250VAC

Mechanical Specifications

Mounting	35 mm DIN rail, EN 50022
Dimensions	60x33x43 mm
Weight	40 g
Protection Type	IP20

Environmental Specification

Storage/Operating Temperature	-20°C to 80°C
Humidity	<95 RH

DimensionThermostat
VIPS TH NCThermostat
VIPS TH NO**Connection Diagram****Ordering Information**

Ordering Code	Description
VIPS THNO	Thermostat Normally Open contacts
VIPS THNC	Thermostat Normally Closed contacts

॥ श्री गणेशाय नमः ॥ ॥ જે જે શ્રી ગોકુલેશ ॥

Dipenbhai Kadakia **Chiragbhai Kadakia**
MOBILE : +91-9619800070 MOBILE : +91-9833935831

VRAJ LINK
1st Choice for Changeover & Automatic transfer switch (Alys) Specialist

ASCO Power Technologies By Schneider Electric
HPL
elmex
socomec
VERITEK
Pyok dv's
Finolex Cables Limited
AXON
ELMEASURE
Be Switchgear India

Admin. Off.: Shop No. 17, Gr. Flr., Opp. Electric Crematorium, 66/74 Chandanwadi, Marine Lines (e), Mumbai - 400 002. Tel.: +91 9223310978 E-mail : vrajlink09@gmail.com Website : www.vrajlink.com

OFFICE WHATSAPP NUMBER : 9223310978