

Common Features:

Apertures accepting a wide range of busbar size.
 Easy Busbar Mounting.
 CT's are ultrasonically welded and are unbreakable.
 Terminals are finger touch proof for safety
 Highly Cost effective.
 Compact in size:

Specification:


System Voltage	720 V maximum	Saturation coefficient	< 5
Test Voltage	3kV for 1minute	Insulation Class	Class E
System Frequency	50 Hz or 60 Hz	Secondary terminals	M5 Screw clamps
Primary ratings	From 50A to 4000A	Operating Temperature	-20° C to +70° C
Secondary outputs	5A is standard; 1A on request	Humidity	< 95% RH (non condensing)
Short circuit thermal Current (Ith)	60 x Rated primary current for 1 sec	Enclosure	Flame retardant glass filled ABS
Over load withstand	1.2 times rated current continuously	Compliance with	VE 404 and IEC185 / IEC61869
Rated dynamic Current	2.55 x Ith	Mounting hardware	Feet and Busbar screws

vrajlink.com



MODEL-301

MODEL	RATIO		1 VA	2.5 VA	5 VA
301-60/5A	60/5A	CLASS	3	-	-
301-75/5A	75/5A	CLASS	3	-	-
301-80/5A	80/5A	CLASS	3	-	-
301-100/5A	100/5A	CLASS	1	-	-
301-125/5A	125/5A	CLASS	1	-	-
301-150/5A	150/5A	CLASS	1	3	-
301-200/5A	200/5A	CLASS	-	1	-
301-250/5A	250/5A	CLASS	-	1	-
301-300/5A	300/5A	CLASS	-	1	3
301-400/5A	400/5A	CLASS	-	-	1
301-500/5A	500/5A	CLASS	-	-	1
301-600/5A	600/5A	CLASS	-	-	1

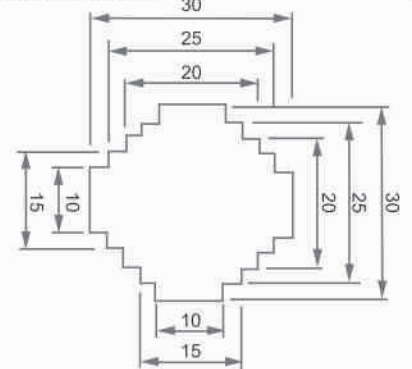
Bus Bar Dimension

Outer Dimension : 49 x (W) x 73.5 (H) x 32 (D)



MODEL-401

MODEL	RATIO		2.5 VA	5 VA	7.5 VA
401-150/5A	150/5A	CLASS	3	-	-
401-200/5A	200/5A	CLASS	1	-	-
401-250/5A	250/5A	CLASS	1	-	-
401-300/5A	300/5A	CLASS	1	3	-
401-400/5A	400/5A	CLASS	-	1	3
401-500/5A	500/5A	CLASS	-	0.5	1
401-600/5A	600/5A	CLASS	-	0.5	1
401-750/5A	750/5A	CLASS	-	0.5	1
401-800/5A	800/5A	CLASS	-	0.5	1

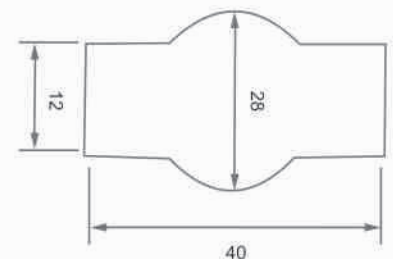
Bus Bar Dimension

Outer Dimension : 60 x (W) x 80 (H) x 32 (D)



MODEL-501

MODEL	RATIO		10 VA
501-125/5A	125/5A	CLASS	0.5
501-150/5A	150/5A	CLASS	0.5
501-200/5A	200/5A	CLASS	0.5
501-250/5A	250/5A	CLASS	0.5
501-300/5A	300/5A	CLASS	0.5
501-400/5A	400/5A	CLASS	0.5

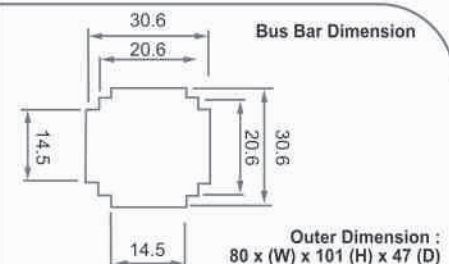
Bus Bar Dimension

Outer Dimension : 80 x (W) x 101 (H) x 47 (D)



MODEL-3301

MODEL	RATIO		1.25 VA	2.5 VA	5 VA	10 VA
3301-50/5A	50/5A	CLASS	3	-	-	-
3301-60/5A	60/5A	CLASS	1	-	-	-
3301-75/5A	75/5A	CLASS	1	-	-	-
3301-80/5A	80/5A	CLASS	1	-	-	-
3301-100/5A	100/5A	CLASS	-	-	1	-
3301-125/5A	125/5A	CLASS	-	-	1	-
3301-150/5A	150/5A	CLASS	-	-	1	-
3301-200/5A	200/5A	CLASS	-	-	1	-
3301-250/5A	250/5A	CLASS	-	-	-	1
3301-300/5A	300/5A	CLASS	-	-	-	1
3301-400/5A	400/5A	CLASS	-	-	-	1
3301-500/5A	500/5A	CLASS	-	-	-	1
3301-600/5A	600/5A	CLASS	-	-	-	1
3301-750/5A	750/5A	CLASS	-	-	-	1

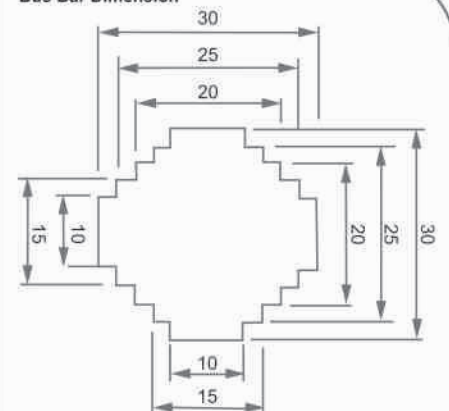
Bus Bar Dimension

Outer Dimension : 62 x (W) x 79 (H) x 36 (D)


OFFICE WHATSAPP NUMBER : 9223310978




MODEL	Class 1	
	Burden (VA)	
4401-150/5A	2.5	
4401-200/5A	2.5	
4401-250/5A	2.5	
4401-300/5A		5
4401-400/5A		5
4401-500/5A		5
4401-600/5A		5
4401-750/5A		5
4401-800/5A		5

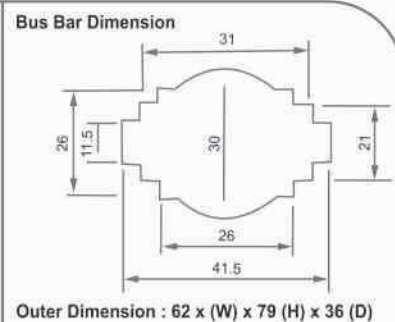


MODEL	Class 1			Class 0.5	
	Burden (VA)			Burden (VA)	
601-200/5A	2.5				
601-250/5A	2.5	5			
601-300/5A	2.5	5			
601-400/5A	2.5	5	10		
601-500/5A	5	7.5	15	10	
601-600/5A	5	10	15	10	
601-750/5A	5	10	15	10	
601-800/5A	5	10	15	10	
601-1000/5A	10	15	15	10	15
601-1200/5A	10	15	30	10	15
601-1250/5A	10	15	30	10	15
601-1500/5A	10	15	30	10	15
601-1600/5A	10	15	30	10	15

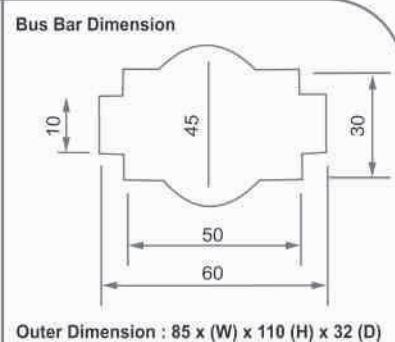


MODEL	Class 1			Class 0.5	
	Burden (VA)			Burden (VA)	
801-400/5A	2.5		5		5
801-500/5A	2.5	5	7.5		5
801-600/5A	2.5	5	10		5
801-750/5A	2.5	5	10		10
801-800/5A	5	7.5	10		10
801-1000/5A	5	7.5	10		10
801-1200/5A	5	7.5	10		10
801-1250/5A	5	7.5	10		10
801-1500/5A	5	10	15		10
801-1600/5A	5	10	15		10
801-2000/5A	5	10	15		10

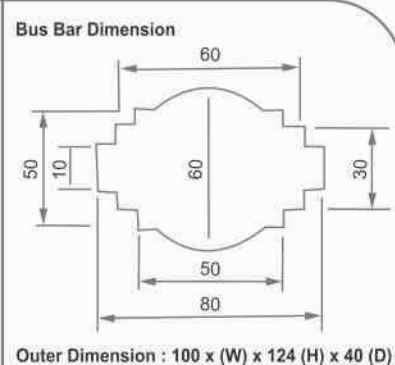

MODEL	Class 1			Class 0.5	
	Burden (VA)			Burden (VA)	
1001-400/5A	5				
1001-500/5A	5				
1001-600/5A	5	10		10	
1001-750/5A	5	10		10	
1001-800/5A	5	10		10	
1001-1000/5A	5	10		10	15
1001-1200/5A	5	10	15	10	15
1001-1250/5A	5	10	15	10	15
1001-1500/5A	5	10	15	10	15
1001-1600/5A	5	10	15	10	15
1001-2000/5A	5	10	15	10	15
1001-3000/5A	5	10	15	10	15
1001-4000/5A	5	10	15	10	15

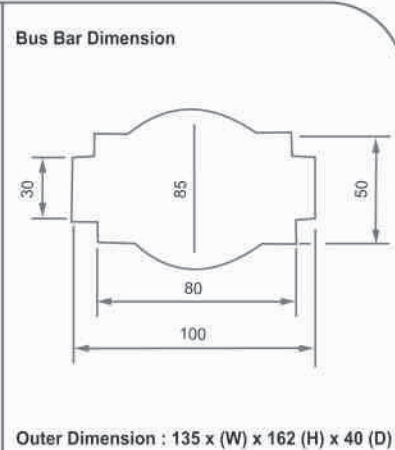




MODEL	Class 1		Class 0.5	
	Burden (VA)		Burden (VA)	
1020-750/5A	10		10	
1020-800/5A	10		10	
1020-1000/5A	10		15	
1020-1200/5A	10		15	
1020-1250/5A	10		15	
1020-1500/5A	15		15	
1020-1600/5A	15		15	
1020-2000/5A	15		15	
1020-2500/5A	15		15	
1020-3000/5A	15		15	

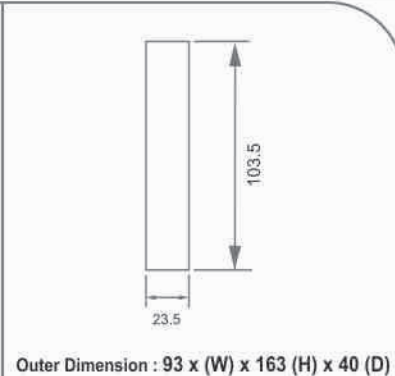






Models	VIPS 63104460										VIPS 80105580										VIPS 100308510												
Accuracy	Class 1					Class 0.5					Class 1					Class 0.5					Class 1					Class 0.5							
Ratio (A)	Burden (VA)					Burden (VA)					Burden (VA)					Burden (VA)					Burden (VA)					Burden (VA)							
200/5	1.5	2.5				1.5	2.5																										
250/5	1.5	2.5				1.5	2.5																										
300/5	1.5	2.5	5			1.5	2.5	5																									
400/5	1.5	2.5	5	10		1.5	2.5	5	10		2.5	5				2.5	5	10			2.5	5	10			2.5	5	10	15	30			
500/5	1.5	2.5	5	10	15		2.5	5	10	15	2.5	5	10			2.5	5	10			2.5	5	10			2.5	5	10					
600/5		2.5	5	10	15		2.5	5	10	15	2.5	5	10			2.5	5	10			5	10				2.5	5	10					
750/5		2.5	5	10	15		2.5	5	10	15	2.5	5	10	15		2.5	5	10	15		5	10				5	10						
800/5		2.5	5	10	15		2.5	5	10	15	2.5	5	10	15		2.5	5	10	15		5	10	15			5	10						
1000/5			5	10	15	30			5	10	15	30	2.5	5	10	15	30			5	10	15				5	10						
1200/5			5	10	15	30			5	10	15	30	5	10	15	30			5	10	15				5	10							
1250/5			5	10	15	30			5	10	15	30	5	10	15	30			5	10	15				5	10							
1500/5			5	10	15	30			5	10	15	30	5	10	15	30	45			5	10	15				5	10	15					
1600/5			5	10	15	30			5	10	15	30	5	10	15	30	45			5	10	15				10	15	30	45	5	10	15	
1800/5																										10	15	30	45	5	10	15	
2000/5													10	15	30	45										10	15	30	45	5	10	15	30
2400/5																																	
2500/5																										10	15	30	45	5	10	15	30

Bus Bar Dimension



Models	VIPS 60304460										VIPS 80166180										VIPS 100555510										
Accuracy	Class 1					Class 0.5					Class 1					Class 0.5					Class 1					Class 0.5					
Ratio (A)	Burden (VA)					Burden (VA)					Burden (VA)					Burden (VA)					Burden (VA)					Burden (VA)					
400/5																															
500/5											2.5	5					2.5	5	10												
600/5	1.5	2.5				1.5	2.5				2.5	5	10				2.5	5	10			2.5	5	10			2.5	5			
750/5		2.5	5				2.5	5			2.5	5	10				2.5	5	10			5	10				2.5	5	10		
800/5			5	10				5			2.5	5	10	15			2.5	5	10	15		5	10					5	10		
1000/5			5	10	15			5	10		2.5	5	10	15			2.5	5	10	15		5	10				2.5	5	10	15	
1200/5			5	10	15			5	10	15	2.5	5	10	15	30			5	10	15		5	10	15				5	10	15	
1250/5			5	10	15			5	10	15		5	10	15	30			5	10	15		5	10	15				5	10	15	30
1500/5			5	10	15			5	10	15		5	10	15	30			5	10	15		5	10	15	30			5	10	15	30
1600/5			5	10	15			5	10	15		5	10	15	30	45		5	10	15		5	10	15	30			5	10	15	30
1800/5			5	10	15			5	10	15		5	10	15	30	45		5	10	15		5	10	15	30			5	10	15	
2000/5			5	10	15			5	10	15												10	15	30	45			5	10	15	30
2400/5			5	10	15			5	10	15			10	15	30	45			10	15								5	10	15	30
2500/5			5	10	15			5	10	15												10	15	30	45			5	10	15	30
3000/5			5	10	15			5	10	15												10	15	30	45			5	10	15	30

Bus Bar Dimension



OFFICE WHATSAPP NUMBER : 9223310978

Common Features:

Apertures accepting a wide range of busbar size.
Easy Busbar Mounting.
CT's are ultrasonically welded and are unbreakable.
Terminals are finger touch proof for safety
Highly Cost effective.
Compact in size.

Specification:




System Voltage	720 V maximum	Saturation coefficient	< 5
Test Voltage	3kV for 1minute	Insulation Class	Class E
System Frequency	50 Hz or 60 Hz	Secondary terminals	M5 Screw clamps
Primary ratings	From 200A to 3000A	Operating Temperature	-20° C to +70° C
Secondary outputs	5A is standard; 1A on request	Humidity	< 95% RH (non condensing)
Short circuit thermal Current (Ith)	60 x Rated primary current for 1 sec	Enclosure	Flame retardant glass filled ABS
Over load withstand	1.2 times rated current continuously	Compliance with	VE 404 and IEC185 / IEC61869
Rated dynamic Current	2.55 x Ith	Mounting hardware	Feet and Busbar screws



Outer Dimension :
61 (W) x 78.5 (H) x 30 (D)

Models	VIPS 30102630								VIPS 30182630								VIPS 40122630							
Accuracy	Class 1				Class 0.5				Class 1				Class 0.5				Class 1							
Ratio (A)	Burden (VA)				Burden (VA)				Burden (VA)				Burden (VA)				Burden (VA)							
50/5 A	1																							
75/5	1	1.5							1	1.5														
80/5		1.5	2.5							1.5	2.5													
100/5		1.5	2.5			1.5	2.5			1.5	2.5			1.5	2.5			1	1.5					
150/5		1.5	2.5			1.5	2.5			1.5	2.5			1.5	2.5			1.5	2.5					
200/5		1.5	2.5	5		1.5	2.5	5			2.5	5			2.5	5	10		1.5	2.5				
250/5		1.5	2.5	5	10	1.5	2.5	5	10		2.5	5	10		2.5	5	10		1.5	2.5	5			
300/5		1.5	2.5	5	10	1.5	2.5	5			2.5	5	10		2.5	5	10		1.5	2.5	5			
400/5		1.5	2.5	5	10		2.5	5	10		2.5	5	10		2.5	5	10		1.5	2.5	5			
500/5			2.5	5	10		2.5	5	10		2.5	5	10		2.5	5	10		1.5	2.5	5	10		
600/5		1.5	2.5	5	10		2.5	5	10		2.5	5	10	15	2.5	5	10	15	1.5	2.5	5	10		
750/5			2.5	5	10		2.5	5	10		2.5	5	10	15	2.5	5	10	15		2.5	5	10	15	
800/5																				2.5	5	10	15	

Bus Bar
Dimension

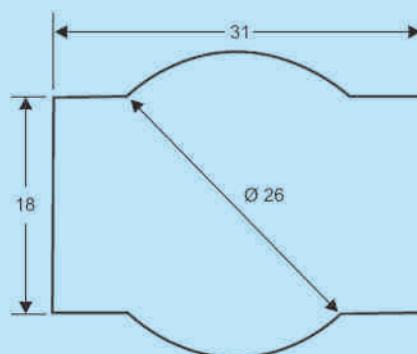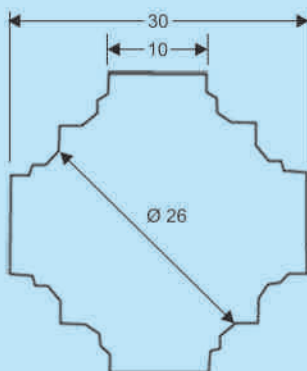



Outer Dimension :
71 (W) x 88.5 (H) x 40 (D)

Models	VIPS 30102640										VIPS 40103240										VIPS 40123040													
Accuracy	Class 1					Class 0.5					Class 1					Class 0.5					Class 1					Class 0.5								
Ratio (A)	Burden (VA)					Burden (VA)					Burden (VA)					Burden (VA)					Burden (VA)					Burden (VA)								
30/5	1																																	
40/5	1.5																																	
50/5	1.5	2.5				1.5				1.25	1.5									1.25	1.5													
60/5	1.5	2.5	5			1.5				1.25	1.5									1.25	1.5													
75/5		2.5	5			2.5				1.5	2.5									1.5	2.5													
80/5		2.5	5			2.5				1.5	2.5									1.5	2.5													
100/5		2.5	5	10		2.5	5			1.5	2.5	3.75			1.5	2.5				1.5	2.5	3.75				1.5								
125/5		2.5	5	10		2.5	5			1.5	2.5	5																						
150/5			5	10		2.5	5			2.5	5	10			1.5	2.5	5			1.5	2.5	5				1.5	2.5							
200/5			5	10	15		2.5	5			2.5	5	10			1.5	2.5	5			2.5	5	10				2.5							
250/5			5	10	15			5	10			2.5	5	10			1.5	2.5	5			1.5	2.5	5	10			1.5	2.5	5				
300/5											2.5	5	10	15			2.5	5	10			2.5	5	10	15			2.5	5					
400/5											2.5	5	10	15			2.5	5	10			2.5	5	10	15			2.5	5	10				
500/5			2.5	5	10	15		2.5	5	10	15		2.5	5	10		2.5	5	10			2.5	5	10	15			2.5	5	10				
600/5			2.5	5	10	15		2.5	5	10	15		2.5	5	10		2.5	5	10			2.5	5	10	15			2.5	5	10				
750/5				5	10	15			5	10	15			5	10	15	30		5	10	15				5	10	15	30			5	10	15	
800/5				5	10	15	30			5	10				5	10	15	30		5	10					5	10	15	30			5	10	15
1000/5				5	10	15	30			5	10	15				5	10	15	30		5	10	15											
Bus Bar Dimension																																		

OFFICE WHATSAPP NUMBER : 9223310978


Common Features:

Easy Busbar Mounting.
 CT's are ultrasonically welded and are unbreakable.
 Terminals are finger touch proof for safety
 Highly Cost effective.
 Compact Round CT


Specification:

System Voltage	720 V maximum	Saturation coefficient	< 5
Test Voltage	3kV for 1minute	Insulation Class	Class E
System Frequency	50 Hz or 60 Hz	Secondary terminals	M5 Screw clamps
Primary ratings	From 50A to 1200A	Operating Temperature	-20° C to +70° C
Secondary outputs	5A is standard; 1A on request	Humidity	< 95% RH (non condensing)
Short circuit thermal Current (Ith)	60 x Rated primary current for 1 sec	Enclosure	Flame retardant glass filled ABS
Over load withstand	1.2 times rated current continuously	Compliance with	VE 404 and IEC185 / IEC61869
Rated dynamic Current	2.55 x Ith	Mounting hardware	Feet and Busbar screws


MODEL	Ratio		1 (VA)	2.5 (VA)	5 (VA)
VIPS 308050-60/5-3-1	60/5	Class	3	-	-
VIPS 308050-75/5-3-1	75/5	Class	3	-	-
VIPS 308050-80/5-3-1	80/5	Class	3	-	-
VIPS 308050-100/5-1-1	100/5	Class	1	-	-
VIPS 308050-150/5-1-2.5	150/5	Class	-	1	-
VIPS 308050-200/5-1-2.5	200/5	Class	-	1	-
VIPS 308050-250/5-1-5	250/5	Class	-	1	-
VIPS 308050-300/5-1-5	300/5	Class	-	-	1
VIPS 308050-400/5-1-5	400/5	Class	-	-	1
MODEL	Ratio		Higher Burden 5 (VA)		
VIPS 308050-100/5-1-5	100/5	Class	1		
VIPS 308050-150/5-1-5	150/5	Class	1		
VIPS 308050-200/5-1-5	200/5	Class	1		
VIPS 308050-250/5-1-5	250/5	Class	1		

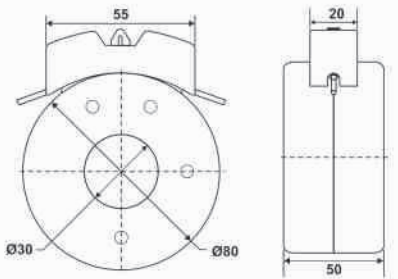


MODEL	Ratio		2.5 (VA)	5 (VA)
VIPS 439241-150/5-1-2.5	150/5	Class	1	-
VIPS 439241-200/5A-1-2.5	200/5A	Class	1	-
VIPS 439241-250/5A-1-2.5	250/5A	Class	1	-
VIPS 439241-300/5A-1-5	300/5A	Class	-	1
VIPS 439241-400/5A-1-5	400/5A	Class	-	1

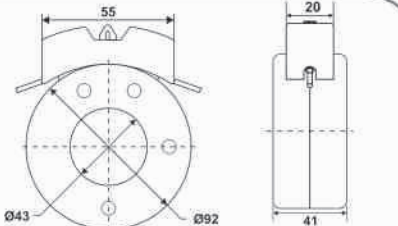

MODEL	Ratio		5 (VA)	10 (VA)
VIPS 6010035-300/5-1-5	300/5	Class	1	-
VIPS 6010035-400/5-1-10	400/5	Class	-	1
VIPS 6010035-500/5-1-10	500/5	Class	-	1
VIPS 6010035-600/5-1-10	600/5	Class	-	1

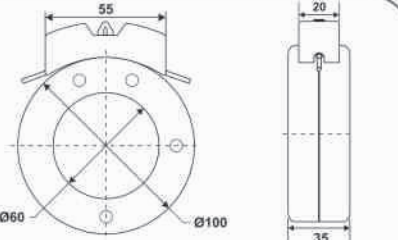

MODEL	Ratio		10 (VA)
VIPS 8512535-400/5-1-10	400/5	Class	1
VIPS 8512535-500/5-1-10	500/5	Class	1
VIPS 8512535-600/5-1-10	600/5	Class	1
VIPS 8512535-750/5-1-10	750/5	Class	1
VIPS 8512535-800/5-1-10	800/5	Class	1
VIPS 8512535-1000/5-1-10	1000/5	Class	1

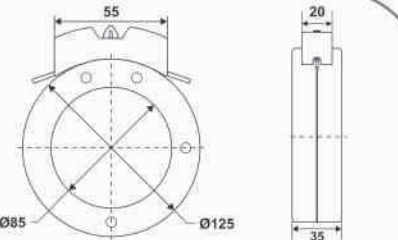

MODEL	Ratio		10 (VA)
VIPS 11315940-800/5-1-10	800/5	Class	1
VIPS 11315940-1000/5-1-10	1000/5	Class	1
VIPS 11315940-1200/5-1-10	1200/5	Class	1

